

MOST150 C-O Converter - Simplex Variant



Copyright © 2013 K2L GmbH ("K2L"). All rights reserved.

Please make sure that all information within a document marked as 'Confidential' or 'Restricted Access' is handled solely in accordance with the agreement pursuant to which it is provided, and is not reproduced or disclosed to others without the prior written consent of K2L. The confidential ranking of a document can be found in the footer of every page. This document supersedes and replaces all information previously supplied. The technical information in this document loses its validity with the next edition. Although the information is believed to be accurate, no responsibility is assumed for inaccuracies. Specifications and other documents mentioned in this document are subject to change without notice. K2L reserves the right to make changes to this document and to the products at any time without notice. Neither the provision of this information nor the sale of the described products conveys any licenses under any patent rights or other intellectual property rights of K2L or others. The products may contain design defects or errors known as anomalies, including but not necessarily limited to any which may be identified in this document, which may cause the product to deviate from published descriptions. Anomalies are described in errata sheets available upon request. K2L products are not designed, intended, authorized or warranted for use in any life support or other application where product failure could cause or contribute to personal injury or severe property damage. Any and all such uses without prior written approval of an officer of K2L will be fully at your own risk. The K2L logo is a trademark of K2L. Other names mentioned may be trademarks of their respective holders.

K2L disclaims and excludes any and all warranties, including without limitation any and all implied warranties of merchantability, fitness for a particular purpose, title, and against infringement and the like, and any and all warranties arising from any course of dealing or usage of trade. In no event shall K2L be liable for any direct, incidental, indirect, special, punitive, or consequential damages; or for lost data, profits, savings or revenues of any kind; regardless of the form of action, whether based on contract; tort; negligence of K2L or others; strict liability; breach of warranty; or otherwise; whether or not any remedy of buyer is held to have failed of its essential purpose, and whether or not K2L has been advised of the possibility of such damages.

Table of Contents

Chapter 1	Preface.....	5
1.1	Intended Use	5
1.2	Scope of Delivery	5
1.3	Restrictions	5
1.4	Definitions of Terms	6
<hr/>		
Chapter 2	Introduction	7
2.1	Feature Summary	7
2.2	Block Diagram	8
<hr/>		
Chapter 3	Hardware Description	9
3.1	Coaxial Electrical Panel	9
3.2	Optical Panel	10
<hr/>		
Chapter 4	Pin Assignment of the Connectors	11
4.1	MOST150 Connector	11
4.2	Coaxial Connector	11
4.3	Power	11
<hr/>		
Chapter 5	Typical Use Case - Connection Diagram	12
<hr/>		
Chapter 6	Technical Specification	13
<hr/>		
Chapter 7	Revision History	14

List of Figures

Figure 2.1 Block Diagram 8

Figure 3.1 Coaxial Electrical Panel 9

Figure 3.2 Optical Panel 10

Figure 4.1 Pin Assignment of the Power Connector 11

Figure 5.1 Typical Use Case: Connection Diagram 12

List of Tables

Table 1.1 Definitions of Terms 6

Table 3.1 Interfaces on the Coaxial Electrical Panel 9

Table 3.2 Interfaces on the Optical Panel 10

Table 4.1 Pinning of the Power Connector 11

Table 6.1 Mechanical Characteristics 13

Table 6.2 Electrical Characteristics 13

Table 7.1 Customer Revision History 14

Chapter 1 Preface

1.1 Intended Use

The K2L MOST150 C-O Converter is intended to be used for connecting optical tools or devices to a MOST150 system basing on a coax electrical physical layer (cPHY).

1.2 Scope of Delivery

The delivery covers the following:

- MOST150 C-O Converter
- Very short optical MOST cable
- Coaxial cable
- Power adapter cable for use together with OptoLyzer OL3150o / OptoLyzer MOCCA compact V3.1
- Power supply (optional)

Check your shipment for completeness. If you have any complaints direct them to Sales@K2L.de. Providing the delivery note number eases the handling.

1.3 Restrictions

- The MOST150 C-O Converter does not contain any kind of PLL or signal recovery. As a consequence this tool does not completely pass all MOST physical layer compliance tests.
- The MOST150 C-O Converter cannot be used for physical layer tests.
- The MOST150 C-O Converter can only be used for system test setups and demo setups.
- The MOST150 C-O Converter and an optical tool have to be connected using a specific very short optical cable without couplers. The very short optical cable is part of the shipment.

1.4 Definitions of Terms

For better understanding of the following chapters, this section provides explanation to special terms, used in the description of the MOST150 C-O Converter user manual.

Table 1.1 Definitions of Terms

TERM / ABBREVIATION	DESCRIPTION
C-O	Coaxial - Optical
cPHY	coax electrical physical layer
D	Depth
H	Height
MOST [®]	Media Oriented Systems Transport
PLL	Phase-locked loop
VHDL	VHSIC hardware description
VHSIC	Very-high-speed integrated circuits
W	Width

Chapter 2 Introduction

The MOST150 C-O Converter is a small, compact device designated for connecting optical tools or devices to a MOST150 system basing on cPHY. As it has no firmware or VHDL inside and there are no additional control elements the MOST150 C-O Converter is easy to apply.

MOST150 networks can be built up as optical or as coaxial systems. In order to use the features of existing optical-based MOST150 devices also in coaxial systems the MOST150 C-O Converter can be integrated in coaxial systems by just connecting the MOST150 network to the coaxial interfaces of the MOST150 C-O Converter. The optical MOST150 devices can be connected to the optical interface of the MOST150 C-O Converter using the delivered optical MOST cable. Afterwards the MOST150 devices can be used for developing, testing, or analyzing coaxial MOST150 based multimedia products and systems. The MOST150 C-O Converter indicates both 'power is connected' and 'MOST signal is detected'.

2.1 Feature Summary

The following list covers the key features of the MOST150 C-O Converter:

- Compact housing
- Easy usage
- Multiple hardware variants available (see homepage: <http://www.K2L.de>)
- Combined power supply possible for MOST150 C-O Converter and OptoLyzer OL3150o or MOST150 C-O Converter and OptoLyzer MOCCA compact
- No firmware or VHDL inside
- Indication of power detection for both connectors (optical and coaxial)
- Indication of MOST signal detection for both connectors (optical and coaxial)

2.2 Block Diagram

Figure 2.1 shows the features available for the MOST150 C-O Converter.

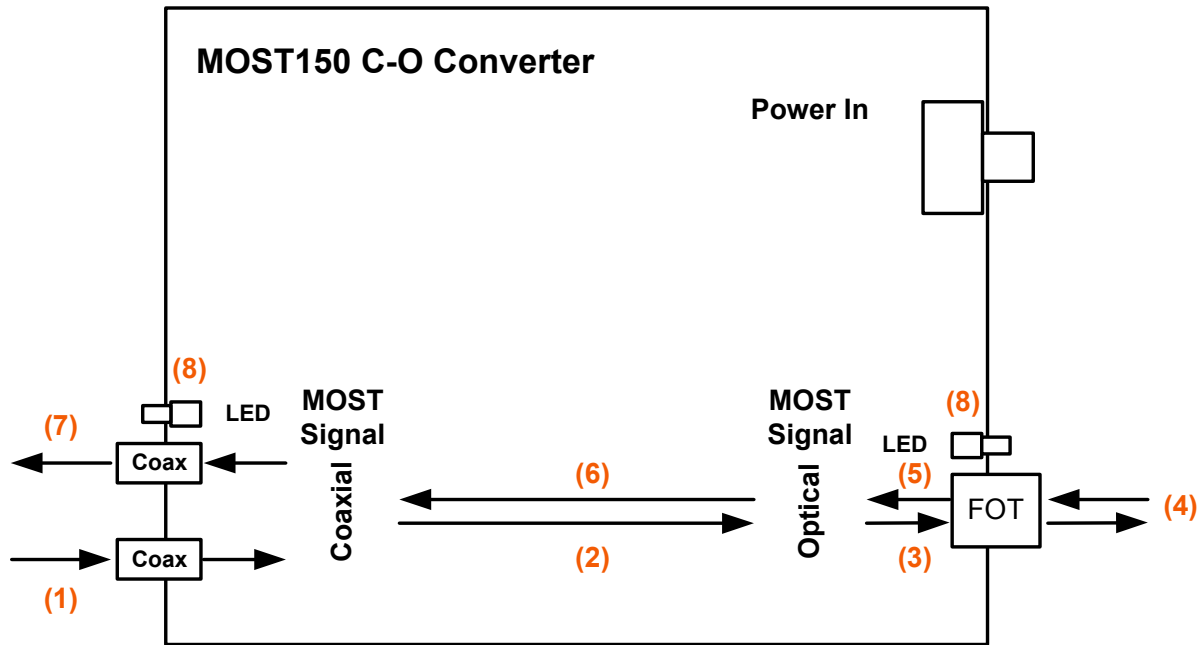


Figure 2.1 Block Diagram

The electrical MOST signal received via the Rx coaxial cable (1) is converted inside the MOST150 C-O Converter (2) and sent to a MOST150 device (oPHY) via the FOT (3). This MOST150 device (e.g., an OptoLyzer OL3150o or an OptoLyzer MOCCA compact V3.1) (4) processes the optical MOST signal and sends it back to the MOST150 C-O Converter where it is received via the FOT (5). Inside the MOST150 C-O Converter the optical MOST signal is converted to an electrical MOST signal (6) and sent via the Tx coaxial cable (7) back into the MOST150 system basing on cPHY.

The LEDs (8) inform whether the MOST150 C-O Converter is connected to power or about the detection of a MOST signal (either optical or electrical).

Chapter 3 Hardware Description

3.1 Coaxial Electrical Panel

Figure 3.1 depicts the coaxial electrical panel of the MOST150 C-O Converter.

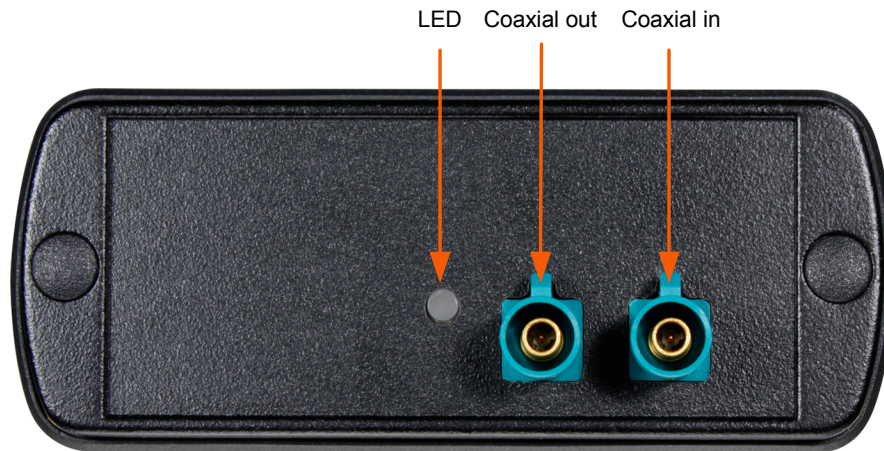


Figure 3.1 Coaxial Electrical Panel

All components of the coaxial electrical panel are described in [Table 3.1](#) from left to right.

Table 3.1 Interfaces on the Coaxial Electrical Panel

INTERFACE	COLOR	DESCRIPTION
LED	Red	MOST150 C-O Converter is powered.
	Green	If the MOST150 C-O Converter is powered and a MOST signal has been detected in the MOST150 system basing on cPHY, the LED switches to green.
Coaxial out	-	Coaxial Tx interface to be connected to the MOST150 system basing on cPHY. For details refer to Section 4.2, "Coaxial Connector," on page 11 .
Coaxial in	-	Coaxial Rx interface to be connected to the MOST150 system basing on cPHY. For details refer to Section 4.2, "Coaxial Connector," on page 11 .

How the MOST150 C-O Converter can be connected is described in [Chapter 5, "Typical Use Case - Connection Diagram,"](#) on [page 12](#).

3.2 Optical Panel

Figure 3.2 depicts the optical panel of the MOST150 C-O Converter.

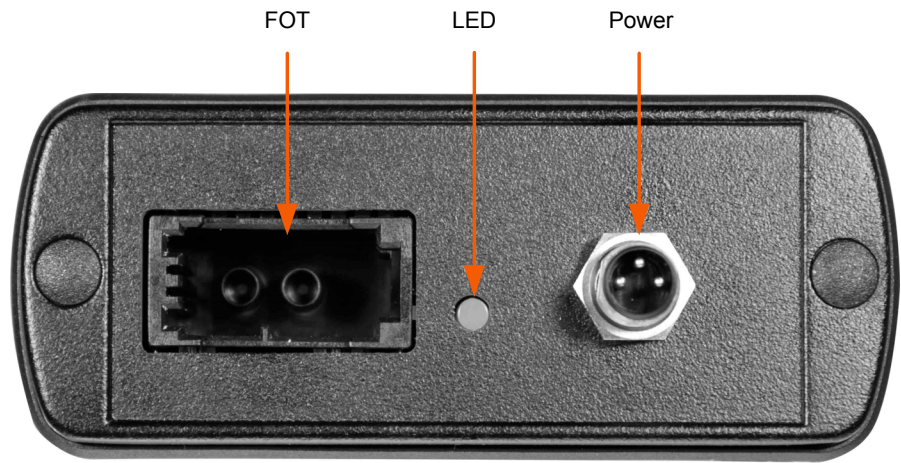


Figure 3.2 Optical Panel

All components of the optical panel are described in Table 3.2 from left to right.

Table 3.2 Interfaces on the Optical Panel

INTERFACE	COLOR	DESCRIPTION
FOT	-	Optical connector. For details refer to Section 4.1, "MOST150 Connector," on page 11.
LED	Red	MOST150 C-O Converter is powered.
	Green	If the MOST150 C-O Converter is powered and a MOST signal has been detected in the MOST150 optical system, the LED switches to green.
Power	-	12 V power supply. For details refer to Section 4.3, "Power," on page 11.

How the MOST150 C-O Converter can be connected is described in [Chapter 5, "Typical Use Case - Connection Diagram,"](#) on page 12.

Chapter 4 Pin Assignment of the Connectors

4.1 MOST150 Connector

Connector type: Tyco Micro Pigtail FOT (2+0).

The orientation of the Rx and Tx path is printed on the top.

The MOST150 connector is designated for a 2+0 optical header cable. The direction is visible on the cable:

- Tx: Optical output for MOST network
- Rx: Optical input for MOST network

4.2 Coaxial Connector

Connector type: 59S20X-40ML5-Z FAKRA

4.3 Power

Figure 4.1 shows the pin assignment as it is visible on the rear panel.




Figure 4.1 Pin Assignment of the Power Connector

Table 4.1 Pinning of the Power Connector

PIN NO.	SIGNAL	DESCRIPTION
1	12 V	Power supply
2	Reserved	-
3	GND	System ground

Chapter 5 Typical Use Case - Connection Diagram

The [Figure 5.1](#) below shows the connection diagram for a typical use case.

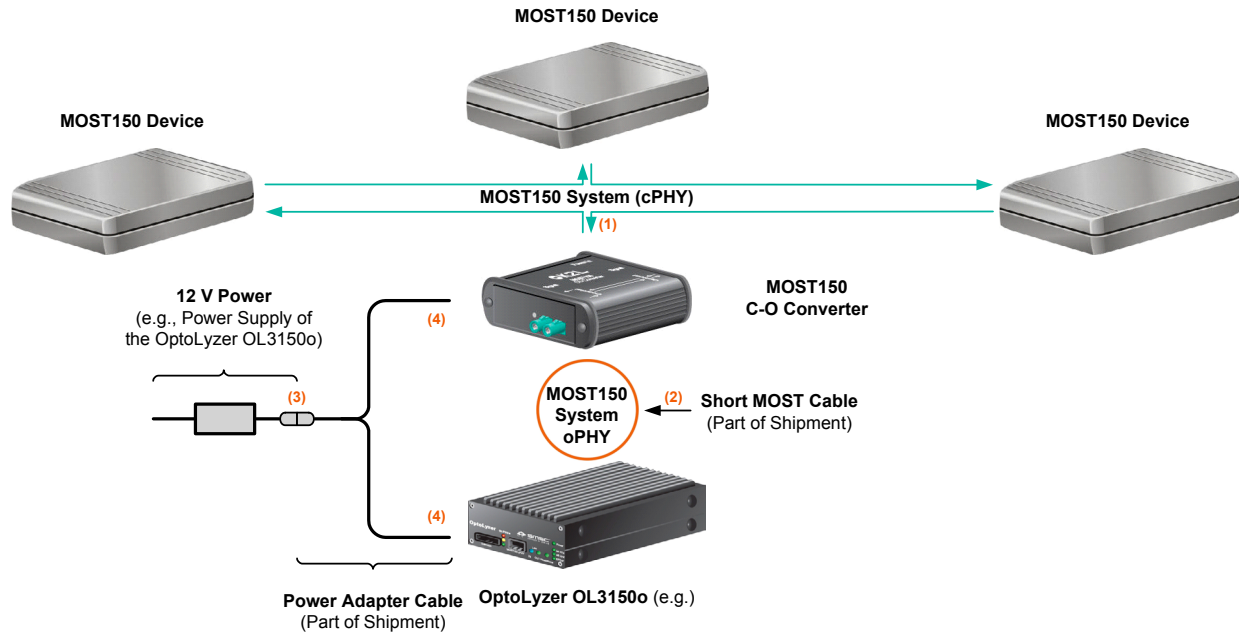


Figure 5.1 Typical Use Case: Connection Diagram

The instructions below describe how the MOST150 C-O Converter can be connected:

1. Power off all devices.
2. Connect the coaxial electrical panel of the MOST150 C-O Converter to a MOST150 system using the delivered coaxial cable (1).
3. Connect an optical MOST150 device (e.g., an OptoLyzer OL3150o or OptoLyzer MOCCA compact V3.1) to the optical panel of the MOST150 C-O Converter using the delivered, very short MOST cable (2).
4. In case an OptoLyzer OL3150o (or OptoLyzer MOCCA compact V3.1) is used as optical MOST150 device, connect the delivered power adapter cable with the power supply pack (3) of the OptoLyzer OL3150o (or OptoLyzer MOCCA compact V3.1) as shown in [Figure 5.1](#).
Alternatively if neither an OptoLyzer OL3150o nor an OptoLyzer MOCCA compact V3.1 is used, connect a power supply pack that has to be ordered separately (not part of shipment). Proceed with step 6.
5. Connect both OptoLyzer OL3150o (or OptoLyzer MOCCA compact V3.1) (4) and the MOST150 C-O Converter (4) with the delivered power adapter cable as shown in [Figure 5.1](#).
6. Power the devices.

Chapter 6 Technical Specification

The table below covers mechanical characteristics of the MOST150 C-O Converter.

Table 6.1 Mechanical Characteristics

PARAMETER	VALUE	UNIT
Dimensions (H x W x D)	110 x 80 x 35	mm
Weight	180	g
Ambient Temperature Range	-40..+60	°C

The table below covers electrical characteristics of the MOST150 C-O Converter.

Table 6.2 Electrical Characteristics

PARAMETER	MIN	TYP	MAX	UNIT
Operating Voltage Range	8	12	30	V
Current Consumption (operation)		100		mA

Chapter 7 Revision History

Table 7.1 Customer Revision History

REVISION LEVEL & DATE	SECTION/FIGURE/ ENTRY	CORRECTION
Rev. 1.0 (06-17-13)	Initial Version	

Further Information

For more information on K2L automotive products, software, and MOST® development tools and modules, visit our web site: <http://www.K2L.de>. Direct contact information is available at: <http://www.K2L.de/contact>.

K2L GmbH
Bannwaldallee 48
D-76185 Karlsruhe
Germany

Technical Support

Contact information for technical support is available at: support@K2L.de