



Austin Design Center
11000 North Mopac Expressway
Stonelake Bldg. 6 Suite 500
Austin, Texas 78759

USB2230 MSC
USB 2.0 Flash Media Controller
**Software Performance and
Compatibility Test Report**

Firmware Version: 523
Report Date: 2/28/2007

Total Test Time Required: 408 Hours

Table of Contents

Testing Overview	4
Test Results	5
Testing Observations and Comments	6
Test Completion Dates	7
Installation Test Suite	8
Overview	8
USB Command Verifier (USBCV) Test Suite	16
Overview	16
Compact Flash / Microdrive Test Suite	17
Overview	17
Smart Media Test Suite	19
Overview	19
xD Test Suite	21
Overview	21
Secure Digital / Multimedia Card Test Suite	23
Overview	23
Memory Stick / Memory Stick Pro Test Suite	29
Overview	29
Media ECC / CIS Test Suite	32
Overview	32
Multiple Device Test Suite	35
Overview	35
Surprise Removal Test Suite	37
Overview	37
Load / Unload Test Suite	44
Overview	44
Bootling from USB Test Suite	50
Overview	50
USB 1.1 Test Suite	52
Overview	52
Driver Test Manager (DTM) Test Suite	61
Overview	61
Current Measurements Test Suite	63
Overview	63
Bundled Software Applications Test Suite	64
Overview	64
Device Firmware Upgrade / Descriptor Update Test Suite	65
Overview	65
LUN Power Configuration Test Suite	68
Overview	68
Memory Stick Compliancy Test Suite	76
Overview	76
Memory Stick Pro Compliancy Test Suite	78
Overview	78
Macintosh OS Specific Testing	79
Overview	79

Test Environment

Hardware:

Test Machine(s): (Include Host Controller Type, Motherboard Model, BIOS version, and Chipset)	Other Hardware:	Chipsets Used for Testing:
<p>Machine 1: QA-101 Bios: AMI v 08009 Mother Board: AsusTek P4P800 Chipset: Intel i865/PE/G/i848P South Bridge: Intel 82801EB (ICH5) processor: Intel Pentium 4 2.6GHz RAM: 512MB EHCI: Intel PCI to USB</p> <p>Machine 2: QA-I64-103 BIOS: DELL rev. 1.0.3 MOTHERBOARD: DELL Inc.(0WF810) CHIPSET: Intel Q965 Express SOUTH BRIDGE: INTEL Q965 ICH8/R/D0 PROCESSOR: INTEL PENTIUM D950 3.4GHz RAM: 1GB EHCI: INTEL Q965 ICH8/R/D0</p> <p>Machine 3: QA I32 107 BIOS: DELL REV A09 MOTHERBOARD: DELL CHIPSET: INTEL I845G SOUTHBRIDGE: INTEL 82801 DB (ICH4) PROCESSOR: INTEL P4 2.0GHz RAM: 512 MB EHCI: INTEL 82801DB (ICH4)</p> <p>Machine 4: QA I64 102 BIOS: DELL REV 1.0.3 MOTHERBOARD: DELL INC. (0WF810) CHIPSET: INTEL Q965 EXPRESS SOUTHBRIDGE: INTEL Q965 ICH8/ R/D0 PROCESSOR: INTEL PENTIUM D950 3.4GHz</p>	<p>Lexar- 32MB, 64MB, 128MB, 256MB, 512MB, 1GB, 2GB SanDisk- 32MB, 64MB, 128MB, 265MB, 512MB Sandisk Ultra II - 1GB, 2GB Delkin Devices- 640 MB MicroDrive: Hitachi - 2GB, 4GB MS: Lexar- 32MB, 64MB, 128MB SanDisk- 64MB, 128MB, Sony- 8MB, 16MB, 32MB, 64MB, 128MB High Speed MS: Sony- 32MB, 64MB, 128MB MSPRO: Sony- 256MB, 512MB, 1GB SanDisk- 256MB, 512MB, 1GB SD: Transcend 150X 4GB Panasonic HS-SD - 512MB, 1GB Sandisk - 32MB, 128MB, 256MB, 512MB Sandisk Ultra II - 512MB, 1GB, 2GB Lexar - 32MB, 64MB, 128MB, 256MB, 512MB, 1GB PNY - 128MB Memorex - 32MB, 128MB Infinion - 64MB, 128MB, 256MB Mini-SD: PDC - 128MB Panasonic - 32MB, 64MB, 128MB SanDisk - 32MB, 64MB HS-SD: Panasonic 512MB, 1GB MMC: Lexar - 32MB, 64MB PQI- 32MB, 64MB, 128MB, 256MB SimpleTech- 32MB, 64MB, 128MB HS-MMC: Samsung - 128MB SmartMedia: SanDisk- 128MB Lexar- 16MB, 32MB, 64MB, 128MB Memorex- 64MB, 128MB XD: Olympus- 32MB, 128MB, 256MB, 512MB Fujifilm Type H - 256MB, 512MB, 1GB</p>	<p>Intel i845E Intel i865P/PE/G Intel i865P/PE/G/i848P Intel i865PE Intel i875P NVIDIA NFORCE 2 Rev A2 SiS648FX VIA KT600 VIA KT400 VIA P4X400(VT8754) Rev3 APPLE</p>
		3rd Party Readers Used for Testing:
		<p>ZIO SM, MS readers Dazzle reader I/O Interconnect reader Firewire reader ImationFlashGO! 2.0</p>

Software:

Drivers and Firmware	Application Software	Operating Systems
<p>USB2230msc.1.523.hex WINXP:MS - USBSTOR.SYS 5.1.2600.1243 Vista: USBSTOR.SYS 6.0.6000.16386 MASS STORAGE CLASS DRIVER WINXP:MS - USBSTOR.SYS 5.1.2600.1243 EHCI DRIVER: MS USBEHCI.SYS 5.1.2600.1243 MS USBEHCI.SYS 5.0.2195.6907 SIIG / OMI OUSBEHCI.SYS 2.1.4 OWC IUSBEHCI.SYS 1.0.3.0 UHCD DRIVER: WINXP: USBUHCI.SYS 5.1.2600.1243</p>	<p>SFV32W.EXE version 1.0.350 SetIcon.exe 1.2.1.2 MAC SFV (10x) version 1.3 MacSFV (8x-9x) version 1.2 Bundled Software Production Line Descriptor Update Utility version 2.0.1.0 Production Line Test Utility version 1.0.0.5 Quick Test Production Line Utility Using Filter Driver version 1.0.0.3 Utility to Format MSPRO media version 1.0.0.2 DOSPLTU SMSC VERSION 2.0 USBDM.EXE VERSION 2.0.0.7 98SafeRemoval.exe 1.0.0.5 Automation.exe version 6-9-04 DFU_App Version 2.1(Mac OS 10x) DFU Version 1.1(Mac OS 9x)</p>	<p>Windows XP SP2 Macintosh OS 10.x Windows Vista Ultimate</p>

Testing Overview

Standard for Certifying Firmware and Drivers:

The USB2230 MSC Test Suite consists of 21 separate functional testing areas designed to fully exercise the capabilities of the USB2230 USB 2.0 Flash Media Controller chip. For a firmware and driver combination to be considered certified by the SMSC QA Test Laboratory, it must receive passing test results in each of the following functional test suites:

<u>Functional Test Suite</u>	<u>Operating Systems</u>
1. Installation	Windows XP and Vista
2. USBCV	Windows XP
3. Compact Flash / Microdrive	Windows XP and Vista
4. Smart Media	Windows XP and Vista
5. xD	Windows XP and Vista
6. Secure Digital / MultiMedia Card	Windows XP and Vista
7. Memory Stick / Memory Stick Pro	Windows XP and Vista
8. Media ECC / CIS	Windows XP and Vista
9. Multiple Device	Windows XP and Vista
10. Surprise Removal	Windows XP and Vista
11. Load / Unload	Windows XP and Vista
12. Booting from USB	Windows XP and Vista
13. USB 1.1	Windows XP and Vista
14. Driver Test Manager (DTM)	Windows XP and Vista
15. Current Measurements	Windows XP and Vista
16. Bundled Software	Windows XP and Vista
17. DFU / Descriptor Update	Windows XP and Vista
18. LUN Power Configuration	Windows XP and Vista
19. Memory Stick Compliancy	Windows XP
20. Memory Stick Pro Compliancy	Windows XP
21. Macintosh OS Specific	Mac OS 10.4

A new firmware–driver combination must pass all test suites for every operating system listed to be considered certified. Note that this standard does not apply to beta software released for evaluation purposes.

Test Results

Test Technician: Will Baleson
Test Technician: Martin Winfield

Test Technician: Daniel Gomez
Test Technician: Adam Carter

Test Suite Results Summary

Test Suite	Windows XP	Windows Vista
# 1 Installation	Pass	Pass
# 2 USBCV	Pass	N/A
# 3 Compact Flash / Microdrive	Pass	Pass
# 4 Smart Media	Pass	Pass
# 5 xD	Pass	Pass
# 6 Secure Digital / MultiMedia Card	Pass	Pass
# 7 Memory Stick / Memory Stick Pro	Pass	Pass
# 8 Media ECC / CIS	Pass	Pass
# 9 Multiple Device	Pass	Pass
# 10 Surprise Removal	Pass	Pass
# 11 Load / Unload	Pass	Pass
# 12 Booting from USB	Pass	Pass
# 13 USB 1.1	Pass	Pass
# 14 Driver Test Manager (DTM)	Pass	Pass
# 15 Current Measurements	Pass	Pass
# 16 Bundled Software	Pass	Pass
# 17 DFU / Descriptor Update	Pass	Pass
# 18 LUN Power Configuration	Pass	Pass
# 19 Memory Stick Compliancy	Pass	N/A
# 20 Memory Stick Pro Compliancy	Pass	N/A
Mac OS 10.4		
# 21 Macintosh OS Specific	Pass	

Testing Observations and Comments

Comments: Explanation of any marginal or failing results from the Test Suite Results Matrix above, along with any other comments concerning the results of testing:

Test Completion Dates

The test suites were completed for each operating system on the dates indicated below:

Test Suite		Windows XP	Tester's Initials	Windows Vista	Tester's Initials
# 1	Installation	2/19/07	WB	2/19/07	DG
# 2	USBCV	2/19/07	MW	N/A	N/A
# 3	Compact Flash / Microdrive	2/20/07	WB	2/19/07	DG
# 4	Smart Media	2/21/07	WB	2/19/07	DG
# 5	xD	2/21/07	MW	2/21/07	DG
# 6	Secure Digital / MultiMedia Card	2/19/07	MW	2/20/17	DG
# 7	Memory Stick / Memory Stick Pro	2/20/07	MW	2/20/07	DG
# 8	Media ECC / CIS	2/19/07	WB	2/20/07	DG
# 9	Multiple Device	2/19/07	WB	2/20/07	DG
# 10	Surprise Removal	2/19/07	MW	2/21/07	AC
# 11	Load / Unload	2/22/07	MW	2/21/07	DG
# 12	Bootling from USB	2/21/07	WB	2/20/07	WB
# 13	USB 1.1	2/26/07	WB	2/23/07	AC
# 14	Driver Test Manager (DTM)	2/26/07	ML	2/23/07	ML
# 15	Current Measurements	2/23/07	WB	2/23/07	WB
# 16	Bundled Software	2/26/07	MW	2/27/07	AC
# 17	DFU / Descriptor Update	2/19/07	WB	2/27/07	AC
# 18	LUN Power Configuration	2/21/07	MW	2/21/07	AC
# 19	Memory Stick Compliancy	2/21/07	MW	N/A	N/A
# 20	Memory Stick Pro Compliancy	2/26/07	MW	N/A	N/A
		Mac OS 10.4	Tester's Initials		
# 21	Macintosh OS Specific	2/27/07	AC		

Installation Test Suite

Overview

This test suite evaluates the installation procedures for the DUT. In order to pass this suite, the following conditions must be met:

1. The operating system correctly identifies all supported flash media devices on attach.
2. Under Windows XP and Vista, the OS automatically loads the native Windows Mass Storage Class driver.
3. All drivers load normally with no blue screens or system freezes before, during, or after they are loaded.
4. The system does not request or require a restart after the drivers have been loaded.
5. No devices appear in the device manager with yellow exclamation marks next to them (yellow banded.)
6. The device does not blue screen the host before, during, or after a system restart. After a system restart, the device is re-enumerated normally.
7. After installation, all device entries appear correctly in the device manager, showing the correct vendor, date, and version information.

#	Test Standard	Windows XP	Windows Vista	Comments
1	<p>Make sure there are no previous installations of the DUT on the host system.</p> <p>Self-Powered Pre Plug—With no media inserted in any of the media slots, attach the USB cable to the host and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p>	Pass	Pass	
2	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—With no media inserted in any of the media slots, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p>	Pass	Pass	

Installation Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
3	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Bus-Powered no media—Configure the device to be bus-powered. With no media inserted in any of the media slots, plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p>	Pass	Pass	
4	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host.</p> <p>Bus-Powered media—Insert CF, MS, SM, and SD cards into their respective slots, and plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that all of the cards can be read from and written to by transferring a small file from the host to each card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p>	Pass	Pass	
5	Repeat step 4 with MD, MS Pro, xD, and MMC cards.	Pass	Pass	

Installation Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
6	<p>Uninstall the DUT hardware entries from the Device Manager and power off the device.</p> <p>Self-Powered Pre Plug—Insert a Smart Media (SM) card into the SM slot, and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the SM card can be read from and written to by transferring a small file from the host to the SM card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat the test with xD.</p>	<p>SM Pass</p> <p>xD Pass</p>	<p>SM Pass</p> <p>xD Pass</p>	
7	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—Using the same SM card inserted in the SM slot, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the SM card can be read from and written to by transferring a small file from the host to the SM card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat the test with xD.</p>	<p>SM Pass</p> <p>xD Pass</p>	<p>SM Pass</p> <p>xD Pass</p>	

Installation Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
8	<p>Uninstall the DUT hardware entries from the Device Manager and power off the device.</p> <p>Self-Powered Pre Plug—Insert a Compact Flash (CF) card into the CF slot, and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the CF card can be read from and written to by transferring a small file from the host to the CF card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat the test with MD.</p>	<p>CF Pass</p> <p>MD Pass</p>	<p>CF Pass</p> <p>MD Pass</p>	
9	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—Using the same CF card inserted in the CF slot, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the CF card can be read from and written to by transferring a small file from the host to the CF card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat the test with MD.</p>	<p>CF Pass</p> <p>MD Pass</p>	<p>CF Pass</p> <p>MD Pass</p>	

Installation Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
10	<p>Uninstall the DUT hardware entries from the Device Manager and power off the device.</p> <p>Self-Powered Pre Plug—Insert a Secure Digital (SD) card into the SD slot, and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the SD card can be read from and written to by transferring a small file from the host to the SD card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat the test with MMC.</p>	<p>SD Pass</p> <p>MMC Pass</p>	<p>SD Pass</p> <p>MMC Pass</p>	
11	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—Using the same SD card inserted in the SD slot, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the SD card can be read from and written to by transferring a small file from the host to the SD card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat the test with MMC.</p>	<p>SD Pass</p> <p>MMC Pass</p>	<p>SD Pass</p> <p>MMC Pass</p>	

Installation Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
12	<p>Uninstall the DUT hardware entries from the Device Manager and power off the device.</p> <p>Self-Powered Pre Plug—Insert a Memory Stick (MS) card into the MS slot, and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the MS card can be read from and written to by transferring a small file from the host to the MS card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat the test with MS Pro.</p>	<p>MS Pass</p> <p>MS Pro Pass</p>	<p>MS Pass</p> <p>MS Pro Pass</p>	
13	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—Using the same MS card inserted in the MS slot, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the MS card can be read from and written to by transferring a small file from the host to the MS card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat the test with MS Pro.</p>	<p>MS Pass</p> <p>MS Pro Pass</p>	<p>MS Pass</p> <p>MS Pro Pass</p>	

Installation Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
14	<p>Uninstall the DUT hardware entries from the Device Manager and power off the device.</p> <p>Self-Powered Pre Plug—Insert CF, MS, SM, and SD cards into their respective slots, and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that all of the cards can be read from and written to by transferring a small file from the host to each card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p>	Pass	Pass	
15	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—Leave the same flash media cards inserted in their slots, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that all of the cards can be read from and written to by transferring a small file from the host to each card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p>	Pass	Pass	

Installation Results (cont.)


#	Test Standard	Windows XP	Windows Vista	Comments
16	Eject and Remove —With media inserted in each slot, test the Right-Click eject functionality for each device. Check to see that no error message is displayed, and that the host reports no media present when trying to access it after eject.	Pass	Pass	
17	Repeat steps 14–16 with MD, MS Pro, xD, and MMC.	Pass	Pass	

USB Command Verifier (USBCV) Test Suite

Overview

This test suite uses the USB Command Verifier Compliance Tool provided by USB.org to ensure that the DUT complies with Chapter 9 of the USB 2.0 specification. Download and install the latest version of this tool (verifying the latest version at <http://www.usb.org/developers/tools>). After installation, copy the latest MSC DLLs into C:\Program Files\USB-IF Test Suite\USB Command Verifier\Libs. Overwrite the older versions of these files in this Libs folder. In order for the device to pass this suite it must successfully pass all Chapter 9 and MSC tests.

#	Test Standard	Windows XP	Windows Vista	Comments
1	Connect the DUT to the host, and insert low-capacity media into each active slot on the device.	Pass	N/A	
2	The device should pass all Chapter 9 tests of the Compliance Utility, with passing logs generated showing no failures. Save the .htm test output for inclusion with this test report.	Pass	N/A	
3	The device should pass all MSC tests of the Compliance Utility, with passing logs generated showing no failures. Save the .htm test output for inclusion with this test report.	Pass	N/A	

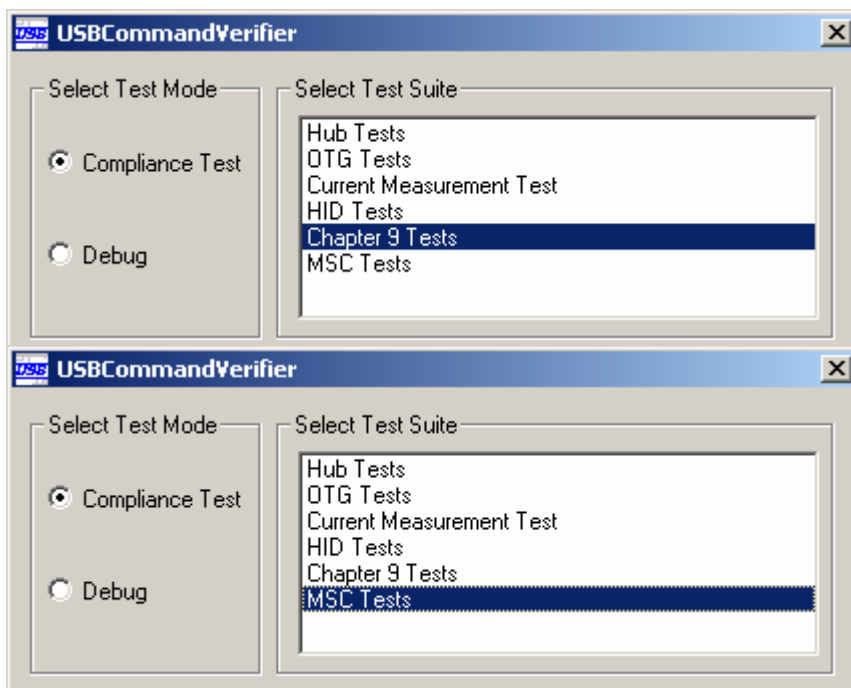

**USB Command Verifier
Chapter 9 Tests**

**USB Command Verifier
MSC Tests**

Compact Flash / Microdrive Test Suite

Overview

This test suite evaluates the performance and function of the DUT with various Type I and II Compact Flash devices, including the Microdrive. All tests below are performed using a USB 2.0 host controller. Each device is checked to verify proper operation with the DUT firmware and drivers under normal and abnormal operating conditions. A DVD test disk is required for these tests. The test disk contains various files ranging in size, with an accompanying SFV file that contains a calculated checksum (CRC) for each file.

#	Test Standard	Windows XP	Windows Vista	Comments
1	<p>CF Writes—Insert a 16MB CF card into the CF slot on the DUT board. Verify that the correct capacity is shown for the CF card.</p> <p>Open the test files disk in Windows Explorer and sort the test files by size in ascending order. Starting with the smallest size file, select enough of the test files to fill the CF card. Transfer the files to the CF card.</p> <p>Once the files have been written, eject the media and place it in a 3rd party flash reader. Use WinSFV to check the CRC of each file to ensure that the data was not corrupted during the transfer.</p>	Pass	Pass	
2	<p>CF Insert/Remove—Double click the DUT CF drive icon in Windows Explorer. Verify that the OS reports no media present. Reinsert the CF card and check to see that the OS recognizes that a card was inserted. Verify that the contents of the card can be read by transferring a file to the host.</p> <p>Repeat this procedure three times, verifying that the media insert and removal is detected correctly each time.</p>	Pass	Pass	

Compact Flash / Microdrive Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
3	CF Reads —Using the same CF card, transfer all of the files that were previously written to the card back to the host. Once the read is complete, CRC check the files on the host to ensure there was no corruption of the data during transfer.	Pass	Pass	
4	CF Write, Insert/Remove, Read Repeat tests 1–3 for the following devices: 8MB CF, 32MB CF, 64MB CF, 128MB CF, 256MB CF, 512MB CF, 1GB CF, 2GB CF, 8GB CF, 2GB MD, 4GB MD, and a 6GB MD.	8MB CF Pass 32MB CF Pass 64MB CF Pass 128MB CF Pass 256MB CF Pass 512MB CF Pass 1GB CF Pass 2GB CF Pass 8GB CF Pass 2GB MD Pass 4GB MD Pass 6GB MD Pass	8MB CF Pass 32MB CF Pass 64MB CF Pass 128MB CF Pass 256MB CF Pass 512MB CF Pass 1GB CF Pass 2GB CF Pass 8GB CF Pass 2GB MD Pass 4GB MD Pass 6GB MD Pass	

Smart Media Test Suite

Overview

This test suite evaluates the performance and function of the DUT with various density Smart Media flash memory cards. All tests below are performed using a USB 2.0 host controller. A DVD test disk is required for these tests. The test disk contains various files ranging in size, with an accompanying SFV file that contains a calculated checksum (CRC) for each file.

#	Test Standard	Windows XP	Windows Vista	Comments
1	<p>SM Writes—Insert an 8MB SM card into the SM slot on the DUT board. Verify that the correct capacity is shown for the SM card.</p> <p>Open the test files disk in Windows Explorer and sort the test files by size in ascending order. Starting with the smallest size file, select enough of the test files to fill the SM card. Transfer the files to the SM card.</p> <p>Once the files have been written, eject the media and place it in a 3rd party flash reader. Use WinSFV to check the CRC of each file to ensure that the data was not corrupted during the transfer.</p>	Pass	Pass	
2	<p>SM Insert/Remove—Double click the DUT SM drive icon in Windows Explorer. Verify that the OS reports no media present. Reinsert the SM card and check to see that the OS recognizes that a card was inserted. Verify that the contents of the card can be read by transferring a file to the host.</p> <p>Repeat this procedure three times verifying that the media insert and removal is detected correctly each time.</p>	Pass	Pass	

Smart Media Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
3	SM Reads —Using the same SM card, transfer all of the files that were previously written to the card back to the host. Once the read is complete, CRC check the files on the host to ensure there was no corruption of the data during transfer.	Pass	Pass	
4	SM Write, Insert/Remove, Read Repeat tests 1 through 3 for the following media: 16MB SM, 32MB SM, 64MB SM, 128MB SM, 256MB SM. Note: If there is not a 256MB SM available, an xD to SM adapter with a 256MB xD card inserted may be used.	16MB SM Pass 32MB SM Pass 64MB SM Pass 128MB SM Pass 256MB SM Pass	16MB SM Pass 32MB SM Pass 64MB SM Pass 128MB SM Pass 256MB SM Pass	
5	SM MPEG Playback Insert a 64MB SM card into the DUT. From Windows Explorer, perform a Full Format of the media. Copy a MPEG video file that is larger than 15MB to the SM card. Once copy has completed, unplug device. Reattach the device and play the file that was copied to the card. Verify that the file is played back properly. The file should not skip or freeze.	Pass	Pass	
6	SM Write Protect Enable the write protect on a 32MB SM card, and insert it into the SM slot on the DUT. Check to see that the media is detected properly, and then attempt to copy a file from the host to the SM card. The OS should report that the copy could not be performed. Attempt to format the SM card. The OS should report that the format could not be completed.	Pass	Pass	

xD Test Suite

Overview

This test suite evaluates the performance and function of the DUT with various density xD flash memory cards. All tests below are performed using a USB 2.0 host controller. A DVD test disk is required for these tests. The test disk contains various files ranging in size, with an accompanying SFV file that contains a calculated checksum (CRC) for each file.

#	Test Standard	Windows XP	Windows Vista	Comments
1	<p>xD Writes—Insert a 16 MB xD card into the xD slot on the DUT board. Verify that the correct capacity is shown for the xD card.</p> <p>Open the test files disk in Windows Explorer and sort the test files by size in ascending order. Starting with the smallest size file, select enough of the test files to fill the xD card. Transfer the files to the xD card.</p> <p>Once the files have been written, eject the media and place it in a 3rd party flash reader. Use WinSFV to check the CRC of each file to ensure that the data was not corrupted during the transfer.</p>	Pass	Pass	
2	<p>xD Insert/Remove—Double click the DUT SM drive icon in Windows Explorer. Verify that the OS reports no media present. Reinsert the xD card and check to see that the OS recognizes that a card was inserted. Verify that the contents of the card can be read by transferring a file to the host.</p> <p>Repeat this procedure three times verifying that the media insert and removal is detected correctly each time.</p>	Pass	Pass	

xD Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
3	xD Reads —Using the same xD card, transfer all of the files that were previously written to the card back to the host. Once the read is complete, CRC check the files on the host to ensure there was no corruption of the data during transfer.	Pass	Pass	
4	xD Write, Insert/Remove, Read Repeat tests 1–3 for the following media: 32MB xD, 64MB xD, 128MB xD, 256MB xD, 512MB xD.	32MB xD Pass 64MB xD Pass 128MB xD Pass 256MB xD Pass 512MB xD Pass	32MB xD Pass 64MB xD Pass 128MB xD Pass 256MB xD Pass 512MB xD Pass	
5	Repeat steps 1–3 using Type “H” xD cards.	256MB Pass 512MB Pass 1GB Pass	256MB Pass 512MB Pass 1GB Pass	
6	Repeat steps 1–3 using Type “M” xD cards.	256MB Pass 512MB Pass 1GB Pass 2GB Pass	256MB Pass 512MB Pass 1GB Pass 2GB Pass	

Secure Digital / Multimedia Card Test Suite

Overview

This test suite evaluates the performance and function of the DUT with various density Secure Digital and Multimedia Card flash memory. All tests below are performed using a USB 2.0 host controller. A DVD test disk is required for these tests. The test disk contains various files ranging in size, with an accompanying SFV file that contains a calculated checksum (CRC) for each file.

#	Test Standard	Windows XP	Windows Vista	Comments
1	<p>SD Writes—Turn off the write protection switch on a 32MB SD card, and insert the card into the SD slot on the DUT board. Verify that the correct capacity is shown for the SD card.</p> <p>Open the test files disk in Windows Explorer and sort the test files by size in ascending order. Starting with the smallest size file, select enough of the test files to fill the SD card. Transfer the files to the SD card.</p> <p>Once the files have been written, eject the media and place it in a 3rd party flash reader. Use WinSFV to check the CRC of each file to ensure that the data was not corrupted during the transfer.</p>	Pass	Pass	
2	<p>SD Insert/Remove—Double click the DUT SD drive icon in Windows Explorer. Verify that the OS reports no media present. Reinsert the SD card and check to see that the OS recognizes that a card was inserted. Verify that the contents of the card can be read by transferring a file to the host.</p> <p>Repeat this procedure three times verifying that the media insert and removal is detected correctly each time.</p>	Pass	Pass	

Secure Digital / Multimedia Card Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
3	SD Reads —Using the same SD card, transfer all of the files that were previously written to the card back to the host. Once the read is complete, CRC check the files on the host to ensure there was no corruption of the data during transfer.	Pass	Pass	
4	SD/MMC Write, Insert/Remove, Read Repeat tests 1 through 3 for the following media: 64MB SD, 128MB SD, 256MB SD, 512MB SD, 1GB SD, 2GB SD, 4GB SD, 16MB MMC, 32MB MMC, 64MB MMC, 128MB MMC, 256MB MMC, SD-HC, and MMC 4.2.	128MB SD Pass 1GB SD Pass 32MB MMC Pass 128MB MMC Pass 256MB MMC Pass SD-HC Pass MMC 4.2 Pass	256MB SD Pass 2GB SD Pass 16MB MMC Pass 64MB MMC Pass 256MB MMC Pass SD-HC Pass MMC 4.2 Pass	
5	SD Write Protect Enable the write protect switch on a 32MB SD card, and insert it into the SD slot on the DUT. Check to see that the media is detected properly, and then attempt to copy a file from the host to the SD card. The OS should report that the copy could not be performed. Attempt to format the SD card. The OS should report that the format could not be completed	SD Pass	SD Pass	
6	HS-SD Format Turn off the write protect switch on an HS-SD card. Insert the HS-SD card into the SD slot of the test device. Verify that the card is recognized properly and the correct capacity is shown. Perform a format on the HS-SD card. Verify that the format completes.	HS-SD Pass	HS-SD Pass	

Secure Digital / Multimedia Card Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
7	<p>HS-SD Writes—Open the test files disk in Windows Explorer and sort the test files by size in ascending order. Starting with the smallest size file, select enough of the test files to fill the HS-SD card. Transfer the files to the HS SD card.</p> <p>Once the files have been written, eject the media and reinsert it to clear the cache. Use WinSFV to check the CRC of each file to ensure that the data was not corrupted during the transfer.</p>	HS-SD Pass	HS-SD Pass	
8	<p>HS-SD Insert/Remove—Remove the HS-SD card from the test device. Double click the DUT SD drive icon in Windows Explorer. Verify that the OS reports no media present. Reinsert the HS-SD card and check to see that the OS recognizes that a card was inserted. Verify that the contents of the card can be read by transferring a file to the host.</p> <p>Repeat this procedure three times, verifying that the media insert and removal is detected correctly each time.</p>	HS-SD Pass	HS-SD Pass	
9	<p>HS-SD Reads—Using the same HS-SD card, transfer all of the files that were previously written to the card back to the host. Once the read is complete, CRC check the files on the host to ensure there was no corruption of the data during transfer.</p>	HS-SD Pass	HS-SD Pass	

Secure Digital / Multimedia Card Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
10	<p>HS-SD Write Protect</p> <p>Enable the write protect switch on an HS-SD card, and insert it into the SD slot on the DUT. Check to see that the media is detected properly, and then attempt to copy a file from the host to the HS-SD card. The OS should report that the copy could not be performed.</p> <p>Attempt to format the HS-SD card. The OS should report that the format could not be completed.</p>	HS-SD Pass	HS-SD Pass	
11	<p>HS-SD Read/Write Speeds</p> <p>Ensure that the test device is operating at USB2.0 speeds.</p> <p>Use HDBench v3.40 to test the read/write speed for a formatted HS-SD card. Record the results in the comments section.</p> <p>Use HDBench v3.40 to test the read/write speed for a formatted SD card (not HS). Record the results in the comments section.</p> <p>Verify that the HS-SD card results in much faster read/write speeds than the non-high speed SD card.</p> <p>Note: The expected speeds for these cards when using brand new media at 2.0 speeds are as follows:</p> <p>HS-SD Read = 10.4 MB/s HS-SD Write = 7.7 MB/s</p> <p>SD Read = 7275 KB/s SD Write = 5340 KB/s</p> <p>These speeds will not be achieved with "old" media, but verify that the differences in speed correlate with the above listed rates in order for this step to pass.</p>	HS-SD Pass	HS-SD Pass	<p>HS-SD Read= 8.316Mb/s</p> <p>HS-SD Write= 4.289Mb/s</p> <p>SD Read= 3.968Mb/s</p> <p>SD Write= 985Kb/s</p>

Secure Digital / Multimedia Card Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
12	<p>HS-MMC Format</p> <p>Insert an HS-MMC card into the SD/MMC slot of the test device. Verify that the card is recognized properly and the correct capacity is shown.</p> <p>Perform a format on the HS- MMC card. Verify that the format completes.</p>	HS-MMC Pass	HS-MMC Pass	
13	<p>HS-MMC Writes—Open the test files disk in Windows Explorer and sort the test files by size in ascending order. Starting with the smallest size file, select enough of the test files to fill the HS-MMC card. Transfer the files to the HS-MMC card.</p> <p>Once the files have been written, eject the media and reinsert it to clear the cache. Use WinSFV to check the CRC of each file to ensure that the data was not corrupted during the transfer.</p>	HS-MMC Pass	HS-MMC Pass	
14	<p>HS-MMC Insert/Remove— Remove the HS-MMC card from the test device. Double click the DUT MMC drive icon in Windows Explorer. Verify that the OS reports no media present. Reinsert the HS-MMC card and check to see that the OS recognizes that a card was inserted. Verify that the contents of the card can be read by transferring a file to the host.</p> <p>Repeat this procedure three times verifying that the media insert and removal is detected correctly each time.</p>	HS-MMC Pass	HS-MMC Pass	

Secure Digital / Multimedia Card Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
15	HS-MMC Reads —Using the same HS-MMC card, transfer all of the files that were previously written to the card back to the host. Once the read is complete, CRC check the files on the host to ensure there was no corruption of the data during transfer.	HS-MMC Pass	HS-MMC Pass	
16	HS-MMC Read/Write Speeds Ensure that the test device is operating at USB2.0 speeds. Use HDBench v3.40 to test the read/write speed for a formatted HS-MMC card. Record the results in the comments section. Use HDBench v3.40 to test the read/w\rite speed for a formatted MMC card (not HS). Record the results in the comments section. Verify that the HS-MMC card results in much faster read/write speeds than the non-high speed MMC card. Approximately double the speed.	HS-MMC Pass	HS-MMC Pass	HS-MMC Read= 7.474Mb/s HS-MMC Write= 5.031Mb/s MMC Read= 2.131Mb/s MMC Write= 1.746Mb/s

Memory Stick / Memory Stick Pro Test Suite

Overview

This test suite evaluates the performance and function of the DUT with various capacity Memory Stick and Memory Stick Pro flash memory cards. All tests below are performed using a USB 2.0 host controller. A DVD test disk is required for these tests. The test disk contains various files ranging in size, with an accompanying SFV file that contains a calculated checksum (CRC) for each file.

#	Test Standard	Windows XP	Windows Vista	Comments
1	<p>MS Writes—Turn off the write protection switch on a 16MB MS card, and insert the card into the MS slot on the DUT board. Verify that the correct capacity is shown for the MS card.</p> <p>Open the test files disk in Windows Explorer and sort the test files by size in ascending order. Starting with the smallest size file, select enough of the test files to fill the MS card. Transfer the files to the MS card.</p> <p>Once the files have been written, eject the media and place it in a 3rd party flash reader. Use WinSFV to check the CRC of each file to ensure that the data was not corrupted during the transfer.</p>	Pass	Pass	
2	<p>MS Insert/Remove—Double click the DUT MS drive icon in Windows Explorer. Verify that the OS reports no media present. Reinsert the MS card and check to see that the OS recognizes that a card was inserted. Verify that the contents of the card can be read by transferring a file to the host.</p> <p>Repeat this procedure three times verifying that the media insert and removal is detected correctly each time.</p>	Pass	Pass	

Memory Stick / Memory Stick Pro Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
3	MS Reads —Using the same MS card, transfer all of the files that were previously written to the card back to the host. Once the read is complete, CRC check the files on the host to ensure there was no corruption of the data during transfer.	Pass	Pass	
4	MS Write, Insert/Remove, Read Repeat tests 1–3 for the following media: 8MB MS, 64MB MS, 128MB MS, 256MB MS, 256MB MS Pro, 512MB MS Pro, 1GB MS Pro.	8MB MS Pass 32MB MS Pass 128MB MS Pass 256MB MS Pro Pass 512MB MS Pro Pass	32MB MS Pass 64MB MS Pass 256MB MS Pass 256MB MS Pro Pass 1GB MS Pro Pass	
5	MS Write Protect Enable the write protect switch on a 32MB MS card, and insert it into the MS slot on the DUT. Check to see that the media is detected properly, and then attempt to copy a file from the host to the card. The OS should report that the copy could not be performed.	Pass	Pass	
6	MS Pro Write Protect Enable the write protect switch on a 512MB MS Pro card, and insert it into the MS slot on the DUT. Check to see that the media is detected properly, and then attempt to copy a file from the host to the card. The OS should report that the copy could not be performed.	Pass	Pass	

Memory Stick / Memory Stick Pro Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
7	Sony Format Utility (MS) Install the Sony Format Utility. Insert MS media. Open the Sony Format Utility and format the MS.	Pass	Pass	
8	Sony Format Utility (MS Pro) Repeat step 7 using MS Pro media.	Pass	Pass	
9	MS Suspend/Write Test Insert a 128MB MS. Copy 4 25MB files to the stick. Suspend the host while the copy process is in progress. Wait 30 seconds and wake the host up. Repeat this step 3–4 times during the copy. When the process has completed remove/reinsert the media and CRC the files. Verify there has been no file corruption.	Pass	Pass	
10	MS Pro Suspend/Write Test Repeat step 9 using MS Pro media. The files copied may have to be increased to have enough time to suspend the host 3–4 times.	Pass	Pass	

Media ECC / CIS Test Suite

Overview

This test verifies that the DUT correctly handles software ECC errors, as well as Smart Media CIS Checking. Only perform this test for Memory Stick, Smart Media, and xD.

The Memory Stick ECC tests require the MS1 ECC (1 bit) and MS4-ECC (4 bit) test sticks. All files needed for the ECC tests are on these particular sticks. The Smart Media and xD ECC and CIS tests require SM and xD media with a 1-bit and 2-bit ECC error, and SM and xD media with a corrupt CIS block.

#	Test Standard	Windows XP	Windows Vista	Comments
1	Memory Stick ECC test Insert the "MS1 ECC" MS card into the DUT. Connect the device to the computer via a 2.0 host controller. Verify that the card contents can be read properly. Open the 1BitDataAreaAdversity.jpg file. Verify it opens and is displayed correctly. Close the file and open the pic2.jpg file. Verify it opens and is displayed correctly.	Pass	Pass	
2	Open the 1BitExtraAreaDelusions.jpg file. Verify it opens and is displayed correctly. Close the file and open the pic3.jpg file. Verify it opens and is displayed correctly.	Pass	Pass	
3	Right click on the 2BitDataAreaMistakes.jpg file and select "copy." Attempt to paste the file to any folder or the desktop. Verify the OS reports a message that the action cannot be completed. Close out the error message. Open the pic4.jpg file. Verify it opens and is displayed correctly.	Pass	Pass	
4	Right click on the 2BitExtraAreaProcrast.jpg file and select "copy." Attempt to paste the file to any folder or the desktop. Verify the OS reports a message that the action cannot be completed. Close out the error message. Open the pic5.jpg file. Verify it opens and is displayed correctly.	Pass	Pass	
5	Repeat steps 1–4 using a 1.1 host controller to connect the DUT to the computer.	Pass	Pass	
6	Repeat steps 1–5 using the "MS4 ECC" MS card.	Pass	Pass	

Media ECC / CIS Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
7	Smart Media ECC test Insert an SM card with a 1-bit ECC error on it into the DUT. Connect the DUT to the computer via a 2.0 host controller. Verify that the card contents can be read properly.	Pass	Pass	
8	Insert an SM card with a 2-bit ECC error on it into the DUT. Verify that the card contents cannot be read properly.	Pass	Pass	
9	Repeat steps 7–8 using a 1.1 host controller to connect the DUT to the computer.	Pass	Pass	
10	Smart Media CIS Check Check the setting for “Don’t Perform (Smart Media) CIS checking” under the Configuration tab in the USBDM. This will disable the CIS checking required by the SM spec. Insert an SM card with a corrupt CIS block into the DUT device. Connect the DUT to the computer via a 2.0 host controller. Verify that the card contents can be read properly.	Pass	Pass	
11	Uncheck the setting “Don’t Perform (Smart Media) CIS checking” under the Configuration tab in the USBDM. This will enable the CIS checking required by the SM spec. Insert an SM card with a corrupt CIS block into the DUT. Connect the DUT to the computer via a 2.0 host controller. Verify that the card contents cannot be read .	Pass	Pass	

Media ECC / CIS Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
12	xD ECC test Insert an xD card with a 1-bit ECC error on it into the DUT. Connect the DUT to the computer via a 2.0 host controller. Verify that the card contents can be read properly.	Pass	Pass	
13	Insert an xD card with a 2-bit ECC error on it into the DUT. Verify that the card contents cannot be read properly.	Pass	Pass	
14	Repeat steps 12–13 using a 1.1 host controller to connect the DUT to the computer.	Pass	Pass	
15	xD CIS Check Check the setting for “Don’t Perform (Smart Media) CIS checking” under the Configuration tab in the USBDM. This will disable the CIS checking required by the SM spec. Insert an xD card with a corrupt CIS block into the DUT. Connect the DUT to the computer via a 2.0 host controller. Verify that the card contents can be read properly.	Pass	Pass	
16	Uncheck the setting for “Don’t Perform (Smart Media) CIS checking” under the Configuration tab in the USBDM. This will enable the CIS checking required by the SM spec. Insert an xD card with a corrupt CIS block into the DUT. Connect the DUT to the computer via a 2.0 host controller. Verify that the card contents cannot be read .	Pass	Pass	

Multiple Device Test Suite

Overview

This test suite evaluates the performance and function of multiple DUTs attached to a single host. All tests below are performed using a USB 2.0 host controller. The focus of this test is to ensure interoperability between all devices when more than one DUT is running on the same host.

#	Test Standard	Windows XP	Windows Vista	Comments
1	<p>Host to B1, B2—Attach two DUT boards to the host via the same host controller. Verify that both boards enumerate properly.</p> <p>Insert CF, MS, SM, and SD cards into both boards. Verify that you can read from and write to all cards individually. Simultaneously transfer several large files from the host to the CF cards on both boards. Verify that the transfers complete normally. Repeat this transfer for SM, MS and SD.</p> <p>Also test writing to different cards on each board simultaneously (e.g. MS on board 1 and SD on board 2).</p>	Pass	Pass	
2	<p>B1, B2 to Host—Using the same boards and test setup as step #1 above, simultaneously transfer a large file from each CF card to the host. Verify that the transfer completes normally. Repeat this transfer for MS, SM and SD.</p> <p>Also test reading from different cards on each board simultaneously (e.g. SM on board 1 and CF on board 2).</p>	Pass	Pass	
3	<p>B1 to B2—Again using the same boards and test setup as step #1, transfer a series of test files (large and small) from the CF card on board 1, to the CF card on board 2. Repeat this transfer for MS, SM, and SD.</p> <p>Also test writing to different cards on board 2 (e.g. SM on board 1 to CF on board 2).</p>	Pass	Pass	

Multiple Device Test Suite (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
4	<p>B1 to Host / Host to B2—Using the same test setup, transfer a test file from the CF card on board 1 to the host, while at the same time transferring a separate file from the host to the CF card on board 2. Repeat this transfer for MS, SM, and SD.</p> <p>Also test reading from and writing to different cards on each board (e.g. SM on board 1 to host, host to CF on board 2).</p>	Pass	Pass	
5	<p>B1 to Host / Host to B1—Leave both boards attached to the host, but for this test perform all of the reads/writes on one board only.</p> <p>Copy a large file from the CF to the host, and copy another large file from the host to the SM. Repeat this test using all possible combinations of CF, MS, SM, and SD, for both reads and writes. Ensure that all transfers complete normally.</p>	Pass	Pass	
6	<p>All Media types—Repeat steps 1–5 of this test suite using MD, MS Pro, xD, and MMC.</p>	Pass	Pass	

Surprise Removal Test Suite

Overview

This test suite evaluates the performance and function of the DUT with media and USB cable surprise removals. All tests below are performed using a USB 2.0 host controller. Each device is checked to verify proper operation with the DUT firmware and drivers under normal and abnormal operating conditions. A DVD test disk is required for these tests. The test disk contains various files ranging in size, with an accompanying SFV file that contains a calculated checksum (CRC) for each file.

#	Test Standard	Windows XP	Windows Vista	Comments
1	CF / MD Surprise Removal (USB) Write —Insert a 512MB CF card and copy a large (~50MB) test file from the host to the CF card. Once the transfer reaches approximately 50% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly, and the CF can be read from and written to. Complete the transfer of the test file to the CF card. Read —Using the same CF card, copy the test file from the CF card to the host. Once the transfer reaches approximately 50% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly, and the CF can be read from and written to. Complete the transfer of the test file to the host.	Write Pass Read Pass	Write Pass Read Pass	
2	CF / MD Surprise Removal (Media) Write —Using the same 512MB CF card, copy a large (~50MB) test file from the host to the CF card. Once the transfer reaches approximately 50% completion, remove the media. Wait 3–5 seconds and close any open warning dialogs. Reinsert the media and check to see that the OS properly recognizes the card, and can read from and write to it. Complete the transfer of the test file to the CF card. Read —Using the same CF card, copy the test file from the CF card to the host. Once the transfer reaches approximately 50% completion, remove the media. Wait 3–5 seconds and close any open warning dialogs. Reinsert the media and check to see that the OS properly recognizes the card, and can read from and write to it. Complete the transfer of the test file to the host.	Write Pass Read Pass	Write Pass Read Pass	

Surprise Removal Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
3	CF / MD Surprise Removal (Format) Using the same CF card, from Windows Explorer, perform a Full Format of the media. Once the format reaches approximately 20% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly. Attempt to format the media again. The format should complete normally.	Pass	Pass	
4	Other CF / MD Media Repeat steps 1–3 using a 64MB CF card and 4GB MD.	64MB CF Pass 4GB MD Pass	64MB CF Pass 4GB MD Pass	
5	SM / xD Surprise Removal (USB) Write —Insert a 64MB SM card and copy a large (~50MB) test file from the host to the SM card. Once the transfer reaches approximately 50% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly, and the SM can be read from and written to. Complete the transfer of the test file to the SM card. Read —Using the same SM card, copy the test file from the SM card to the host. Once the transfer reaches approximately 50% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly, and the SM can be read from and written to. Complete the transfer of the file to the host.	Write Pass Read Pass	Write Pass Read Pass	

Surprise Removal Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
6	<p>SM / xD Surprise Removal (Media)</p> <p>Write—Using the same 64MB SM card, copy a large (~50MB) test file from the host to the SM card. Once the transfer reaches approximately 50% completion, remove the media. Wait 3–5 seconds and close any open warning dialogs. Reinsert the media and check to see that the OS properly recognizes the card, and can read from and write to it. Complete the transfer of the test file to the SM card.</p> <p>Read—Using the same SM card, copy the test file from the SM card to the host. Once the transfer reaches approximately 50% completion, remove the media. Wait 3–5 seconds and close any open warning dialogs. Reinsert the media and check to see that the OS properly recognizes the card, and can read from and write to it. Complete the transfer of the test file to the host.</p>	<p>Write Pass</p> <p>Read Pass</p>	<p>Write Pass</p> <p>Read Pass</p>	
7	<p>SM / xD Surprise Removal (Format)</p> <p>Using the same SM card, from Windows Explorer, perform a Full Format of the media. Once the format reaches approximately 20% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly. Attempt to format the media again. The format should complete normally.</p>	Pass	Pass	
8	<p>Other SM / xD Media</p> <p>Repeat steps 5–7 using a 128MB SM card and 256 MB xD.</p>	<p>128MB SM Pass</p> <p>256MB xD Pass</p>	<p>128MB SM Pass</p> <p>256 MB xD Pass</p>	

Surprise Removal Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
9	<p>SD / MMC Surprise Removal (USB)</p> <p>Write—Insert a 64MB SD card and copy a large (~50 MB) test file from the host to the SD card. Once the transfer reaches approximately 50% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly, and the SD can be read from and written to. Complete the transfer of the test file to the SD card.</p> <p>Read—Using the same SD card, copy the test file from the SD card to the host. Once the transfer reaches approximately 50% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly, and the SD can be read from and written to. Complete the transfer of the file to the host.</p>	<p>Write Pass</p> <p>Read Pass</p>	<p>Write Pass</p> <p>Read Pass</p>	
10	<p>SD / MMC Surprise Removal (Media)</p> <p>Write—Using the same 64MB SD card, copy a large (~50MB) test file from the host to the SD card. Once the transfer reaches approximately 50% completion, remove the media. Wait 3–5 seconds and close any open warning dialogs. Reinsert the media and check to see that the OS properly recognizes the card, and can read from and write to it. Complete the transfer of the test file to the SD card.</p> <p>Read—Using the same SD card, copy the test file from the SD card to the host. Once the transfer reaches approximately 50% completion, remove the media. Wait 3–5 seconds and close any open warning dialogs. Reinsert the media and check to see that the OS properly recognizes the card, and can read from and write to it. Complete the transfer of the test file to the host.</p>	<p>Write Pass</p> <p>Read Pass</p>	<p>Write Pass</p> <p>Read Pass</p>	
11	<p>SD / MMC Surprise Removal (Format)</p> <p>Using the same SD, from Windows Explorer, perform a Full Format of the media. Once the format reaches approximately 20% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly. Attempt to format the media again. The format should complete normally.</p>	<p>Pass</p>	<p>Pass</p>	

Surprise Removal Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
12	Other SD / MMC Media Repeat steps 9–11 using a 256MB SD and 64MB MMC.	256MB SD Pass 64MB MMC Pass	256MB SD Pass 64MB MMC Pass	
13	MS / MS Pro Surprise Removal (USB) Write —Insert a 64MB MS card and copy a large (~50MB) test file from the host to the MS card. Once the transfer reaches approximately 50% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly, and the MS can be read from and written to. Complete the transfer of the test file to the MS card. Read —Using the same MS card, copy the test file from the MS card to the host. Once the transfer reaches approximately 50% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly, and the MS can be read from and written to. Complete the transfer of the file to the host.	Write Pass Read Pass	Write Pass Read Pass	
14	MS / MS Pro Surprise Removal (Media) Write —Using the same 64MB MS card, copy a large (~50MB) test file from the host to the MS card. Once the transfer reaches approximately 50% completion, remove the media. Wait 3–5 seconds and close any open warning dialogs. Reinsert the media and check to see that the OS properly recognizes the card, and can read from and write to it. Complete the transfer of the test file to the MS card. Read —Using the same MS card, copy the test file from the MS card to the host. Once the transfer reaches approximately 50% completion, remove the media. Wait 3–5 seconds and close any open warning dialogs. Reinsert the media and check to see that the OS properly recognizes the card, and can read from and write to it. Complete the transfer of the test file to the host.	Write Pass Read Pass	Write Pass Read Pass	

Surprise Removal Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
15	MS / MS Pro Surprise Removal (Format) Using the same MS card, from Windows Explorer, perform a Full Format of the media. Once the format reaches approximately 20% completion, unplug the USB cable. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly. Attempt to format the media again. The format should complete normally.	Pass	Pass	
16	Other MS / MS Pro Media Repeat steps 13–15 using a 128MB MS and 512MB MS Pro.	128MB MS Pass 512MB MS Pro Pass	128MB MS Pass 512MB MS Pro Pass	
17	Other Media Surprise Removal Write —Insert a miniSD card into the DUT. Begin copying a 25MB file from the host to the media. Once the transfer reaches approximately 50% completion, remove only the SD media from the DUT, leaving the adapter in place. Wait 3–5 seconds and close any open warning dialogs. Remove the adapter from the DUT and reinsert the media into the adapter. Insert the miniSD into the DUT and check to see that the OS properly recognizes the card, and can read from and write to it. Complete the transfer of the test file to the miniSD card. Read —Insert the same miniSD card into the DUT. Begin copying a 25MB file from the media to the host. Once the transfer reaches approximately 50% completion, remove only the SD media from the DUT, leaving the adapter in place. Wait 3–5 seconds and close any open warning dialogs. Remove the adapter from the DUT and reinsert the media into the adapter. Insert the miniSD into the DUT and check to see that the OS properly recognizes the card, and can read from and write to it. Complete the transfer of the test file to the miniSD card. Repeat with Memory Stick duo, Memory Stick Pro duo, xD to SM adapter, and MS to CF adapter.	Mini SD Pass MS duo Pass MS Pro duo Pass xD to SM Pass MS to CF Pass	Mini SD Pass MS duo Pass MS Pro duo Pass xD to SM Pass MS to CF Pass	

Surprise Removal Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
18	<p>USB Cable Removal From Host End</p> <p>Attach the DUT to a host computer using a 15ft. USB cable. Fill all slots of the board with media.</p> <p>Write—Copy a large (~50MB) test file from the host to one of the pieces of media in the DUT. Once the transfer reaches approximately 50% completion, unplug the USB cable from the host end. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly, and the media can be read from and written to. Complete the transfer of the test file.</p> <p>Read—Using the same media card, copy the test file from the DUT to the host. Once the transfer reaches approximately 50% completion, unplug the USB cable from the host end. Wait 3–5 seconds and close any open warning dialogs. Reattach the USB cable and check to see that the device re-enumerates properly, and the media can be read from and written to. Complete the transfer of the file to the host.</p>	<p>Write Pass</p> <p>Read Pass</p>	<p>Write Pass</p> <p>Read Pass</p>	

Load / Unload Test Suite

Overview

This test suite evaluates the function of the DUT under both normal and abnormal conditions, which cause the device to suspend, resume, enumerate, or detach from the host. All tests below are performed using a self-powered DUT attached to a USB 2.0 host controller unless otherwise noted.

#	Test Standard	Windows XP	Windows Vista	Comments
1	Remove all media from DUT device. After disconnecting the USB cable of a properly enumerated DUT device, all entries in the Device Manager associated with that device disappear. The device does not blue screen, freeze, or otherwise adversely affect the host in any way.	Pass	Pass	
2	Upon reattaching the USB cable, the entries in the Device Manager reappear, and the device functions normally.	Pass	Pass	
3	After turning off power to the DUT, all entries in the Device Manager associated with the device disappear. The device does not blue screen, freeze, or otherwise adversely affect the host in any way.	Pass	Pass	
4	After turning power to the DUT back on, the entries in the Device Manager reappear, and the device functions normally.	Pass	Pass	
5	Upon rebooting the host with the DUT enumerated, it does not blue screen, freeze, or otherwise adversely affect the host in any way. All entries associated with the DUT device appear in the Device Manager and are not yellow banded. Repeat this step using a bus-powered DUT.	Pass	Pass	

Load / Unload Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
6	<p>Suspend the host and wait one minute. Resume the host and verify the device is enumerated and operates properly.</p> <p>Repeat this step with a bus-powered DUT.</p>	Pass	Pass	
7	<p>Attach a 2nd DUT to the same host and repeat step 6. Verify both boards re-enumerate and function properly after being resumed. Remove the 2nd device.</p>	Pass	Pass	
8	<p>Insert a CF card containing data into the DUT. Verify that the card can be read.</p> <p>Suspend the host and wait one minute. Resume the host and verify the device is enumerated and operates properly. Check to see that the CF card can be read from and written to.</p> <p>Repeat with MD, SD, HS-SD, MMC, HS-MMC, SM, xD, MS, and MS Pro.</p>	<p>CF Pass</p> <p>MD Pass</p> <p>SD Pass</p> <p>HS-SD Pass</p> <p>MMC Pass</p> <p>HS-MMC Pass</p> <p>SM Pass</p> <p>xD Pass</p> <p>MS Pass</p> <p>MS Pro Pass</p>	<p>CF Pass</p> <p>MD Pass</p> <p>SD Pass</p> <p>HS-SD Pass</p> <p>MMC Pass</p> <p>HS-MMC Pass</p> <p>SM Pass</p> <p>xD Pass</p> <p>MS Pass</p> <p>MS Pro Pass</p>	

Load / Unload Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
9	<p>Insert a CF card containing data into the DUT.</p> <p>Restart the host. Verify that the CF card is recognized and can be read to/written from.</p> <p>Repeat with MD, SD, HS-SD, MMC, HS-MMC, SM, xD, MS, and MS Pro.</p>	<p>CF Pass</p> <p>MD Pass</p> <p>SD Pass</p> <p>HS-SD Pass</p> <p>MMC Pass</p> <p>HS-MMC Pass</p> <p>SM Pass</p> <p>xD Pass</p> <p>MS Pass</p> <p>MS Pro Pass</p>	<p>CF Pass</p> <p>MD Pass</p> <p>SD Pass</p> <p>HS-SD Pass</p> <p>MMC Pass</p> <p>HS-MMC Pass</p> <p>SM Pass</p> <p>xD Pass</p> <p>MS Pass</p> <p>MS Pro Pass</p>	

Load / Unload Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
10	<p>Insert a CF card containing data into the DUT.</p> <p>Shut down the host. Start up the host. Verify that the CF card is recognized and can be read to/written from.</p> <p>Repeat with MD, SD, HS-SD, MMC, HS-MMC, SM, xD, MS, and MS Pro.</p>	<p>CF Pass</p> <p>MD Pass</p> <p>SD Pass</p> <p>HS-SD Pass</p> <p>MMC Pass</p> <p>HS-MMC Pass</p> <p>SM Pass</p> <p>xD Pass</p> <p>MS Pass</p> <p>MS Pro Pass</p>	<p>CF Pass</p> <p>MD Pass</p> <p>SD Pass</p> <p>HS-SD Pass</p> <p>MMC Pass</p> <p>HS-MMC Pass</p> <p>SM Pass</p> <p>xD Pass</p> <p>MS Pass</p> <p>MS Pro Pass</p>	
11	<p>Insert CF, SM, SD, and MS media containing data into the DUT. Verify that all cards can be read.</p> <p>Suspend the host and wait one minute. Resume the host and verify the device is enumerated and operates properly. Check to see that all cards can be read from and written to.</p> <p>Repeat this step using a bus-powered DUT.</p>	Pass	Pass	
12	<p>Using the same set of media, verify that all cards can be read.</p> <p>Restart the host. Verify the device is enumerated and operates properly. Check to see that all cards can be read from and written to.</p> <p>Repeat this step using a bus-powered DUT.</p>	Pass	Pass	

Load / Unload Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
13	<p>Suspend the host and wait one minute. While host is suspended remove some of the media from the DUT. Resume the host and verify the device is enumerated and operates properly.</p> <p>Check to see that the flash media cards not removed during suspend can be read from and written to. Verify that the drives for media removed during suspend cannot be accessed.</p>	Pass	Pass	
14	<p>Remove all of the flash media cards from the DUT and suspend the host. While the host is suspended, reinsert the CF, SM, SD, and MS cards and then resume the host.</p> <p>Verify that all cards are recognized, and can be read from and written to.</p>	Pass	Pass	
15	<p>Shut down the host. Remove some of the media from the DUT while host is shut down. Start up the host and verify the device is enumerated and operates properly.</p> <p>Check to see that the flash media cards not removed while the host was shut down can be read from and written to. Verify that the drives for media that was removed while the host was shut down cannot be accessed.</p>	Pass	Pass	
16	<p>Remove all of the flash media cards from the DUT. Verify that board is properly enumerated.</p> <p>Shut down the host. While host is shut down, insert the same CF, SM, SD, and MS into the DUT. Start up the host.</p> <p>Verify that all cards are recognized, and can be read from and written to.</p>	Pass	Pass	

Load / Unload Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
17	<p>Using the same test setup as above, with all cards inserted in the DUT and properly recognized, unplug the USB cable, wait 2–5 seconds and plug the cable back in. Verify that the device enumerates properly.</p> <p>Repeat this test for 20 iterations. Verify the device enumerates correctly each time and that the media is properly recognized.</p>	Pass	Pass	
18	Repeat steps 11–17 using MD, xD, MMC, and MS Pro.	Pass	Pass	
19	<p>Self-Powered Reboot Endurance</p> <p>Using the Burn-In Test Pro utility, set a host PC to continually reboot with a self-powered DUT attached. Allow the test to run overnight. In the morning, check to see that the test is still running.</p> <p>Halt the test and verify that the DUT is enumerated and operating normally.</p>	Pass	N/A	
20	<p>Bus-Powered Reboot Endurance</p> <p>Using the Burn-In Test Pro utility, set a host PC to continually reboot with a bus-powered DUT attached. Allow the test to run overnight. In the morning, check to see that the test is still running.</p> <p>Halt the test and verify that the DUT is enumerated and operating normally.</p>	Pass	N/A	

Booting from USB Test Suite

Overview

This test suite evaluates the function of the DUT booting from media. All tests below are performed using a USB 2.0 host controller. This test needs to be performed on a machine that supports booting from a USB device.

#	Test Standard	Windows XP	Windows Vista	Comments
1	Boot from CF / MD Configure the DUT to have a single active LUN for Compact Flash. Create a Win98 startup boot disk on a CF card. Insert CF card with Win98 startup boot disk into test device. Connect test device to test machine. Set up the BIOS to choose USB device as boot option. Restart test machine. Verify that test machine boots to CF card in test device. Repeat this test with MD.	CF Pass MD Pass	CF Pass MD Pass	
2	Boot from SM / xD Configure the DUT to have a single active LUN for Smart Media. Create a Win98 startup boot disk on an SM card. Insert SM card with Win98 startup boot disk into test device. Connect test device to test machine. Set up BIOS to choose USB device as boot option. Restart test machine. Verify that test machine boots to SM card in test device. Repeat this test with xD.	SM Pass xD Pass	SM Pass xD Pass	

Booting from USB Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
3	<p>Boot from SD / MMC</p> <p>Configure the DUT to have a single active LUN for Secure Digital.</p> <p>Create a Win98 startup boot disk on an SD card.</p> <p>Insert SD card with Win98 startup boot disk into test device.</p> <p>Connect test device to test machine. Set up BIOS to choose USB device as boot option.</p> <p>Restart test machine.</p> <p>Verify that test machine boots to SD card in test device.</p> <p>Repeat this test with MMC.</p>	<p>SD Pass</p> <p>MMC Pass</p>	<p>SD Pass</p> <p>MMC Pass</p>	
4	<p>Boot from MS / MS Pro</p> <p>Configure the DUT to have a single active LUN for Memory Stick.</p> <p>Create a Win98 startup boot disk on an MS card.</p> <p>Insert MS card with Win98 startup boot disk into test device.</p> <p>Connect test device to test machine. Set up BIOS to choose USB device as boot option.</p> <p>Restart test machine.</p> <p>Verify that test machine boots to MS card in test device.</p> <p>Repeat this test with MS Pro.</p>	<p>MS Pass</p> <p>MS PRO Pass</p>	<p>MS Pass</p> <p>MS PRO Pass</p>	

USB 1.1 Test Suite

Overview

This test suite evaluates the performance and function of the DUT while attached to a USB 1.1 host controller. All tests below are performed using a USB 1.1 host controller, unless specified otherwise.

#	Test Standard	Windows XP	Windows Vista	Comments
1	<p>Make sure there are no previous installations of the DUT on the host system.</p> <p>Self-Powered Pre Plug—With no media inserted in any of the media slots, attach the USB cable to the host and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p>	Pass	Pass	
2	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—Again, with no media inserted in any of the media slots, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p>	Pass	Pass	

USB 1.1 Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
3	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Bus-Powered no media—Configure the device to be bus-powered. With no media inserted in any of the media slots, plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p>	Pass	Pass	
4	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host.</p> <p>Bus-Powered media—Insert CF, MS, SM, and SD cards into their respective slots, and plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that all of the cards can be read from and written to by transferring a small file from the host to each card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p>	Pass	Pass	
5	Repeat step 4 with MD, MS Pro, xD, and MMC cards.	Pass	Pass	

USB 1.1 Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
6	<p>Uninstall the DUT hardware entries from the Device Manager and power off the device.</p> <p>Self-Powered Pre Plug—Insert a Smart Media (SM) card into the SM slot and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the SM card can be read from and written to by transferring a small file from the host to the SM card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat this test using xD.</p>	<p>SM Pass</p> <p>xD Pass</p>	<p>SM Pass</p> <p>xD Pass</p>	
7	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—Using the same SM card inserted in the SM slot, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the SM card can be read from and written to by transferring a small file from the host to the SM card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat this test using xD.</p>	<p>SM Pass</p> <p>xD Pass</p>	<p>SM Pass</p> <p>xD Pass</p>	

USB 1.1 Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
8	<p>Uninstall the DUT hardware entries from the Device Manager and power off the device.</p> <p>Self-Powered Pre Plug—Insert a Compact Flash (CF) card into the CF slot and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the CF card can be read from and written to by transferring a small file from the host to the CF card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat this test using MD.</p>	<p>CF Pass</p> <p>MD Pass</p>	<p>CF Pass</p> <p>MD Pass</p>	
9	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—Using the same CF card inserted in the CF slot, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the CF card can be read from and written to by transferring a small file from the host to the CF card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat this test using MD.</p>	<p>CF Pass</p> <p>MD Pass</p>	<p>CF Pass</p> <p>MD Pass</p>	

USB 1.1 Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
10	<p>Uninstall the DUT hardware entries from the Device Manager and power off the device.</p> <p>Self-Powered Pre Plug—Insert a Secure Digital (SD) card into the SD slot and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the SD card can be read from and written to by transferring a small file from the host to the SD card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat this test using MMC.</p>	<p>SD Pass</p> <p>MMC Pass</p>	<p>SD Pass</p> <p>MMC Pass</p>	
11	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—Using the same SD card inserted in the SD slot, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the SD card can be read from and written to by transferring a small file from the host to the SD card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat this test using MMC.</p>	<p>SD Pass</p> <p>MMC Pass</p>	<p>SD Pass</p> <p>MMC Pass</p>	

USB 1.1 Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
12	<p>Uninstall the DUT hardware entries from the Device Manager and power off the device.</p> <p>Self-Powered Pre Plug—Insert a Memory Stick (MS) card into the MS slot and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the MS card can be read from and written to by transferring a small file from the host to the MS card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat this test using MS Pro.</p>	<p>MS Pass</p> <p>MS Pro Pass</p>	<p>MS Pass</p> <p>MS Pro Pass</p>	
13	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—Using the same MS card inserted in the MS slot, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that the MS card can be read from and written to by transferring a small file from the host to the MS card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p> <p>Repeat this test using MS Pro.</p>	<p>MS Pass</p> <p>MS Pro Pass</p>	<p>MS Pass</p> <p>MS Pro Pass</p>	

USB 1.1 Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
14	<p>Uninstall the DUT hardware entries from the Device Manager and power off the device.</p> <p>Self-Powered Pre Plug—Insert CF, SM, SD, and MS cards into their respective slots and power up the board. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that all of the cards can be read from and written to by transferring a small file from the host to each card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p>	Pass	Pass	
15	<p>Uninstall the DUT hardware entries from the Device Manager. Detach the USB cable from the host and power off the device.</p> <p>Self-Powered Post Plug—Leave the same flash media cards inserted in their slots, power up the board, wait a few seconds and then plug the USB cable into the host. Check to see that the device enumerates properly, the correct drivers are loaded, and a drive icon appears for each LUN supported in the firmware.</p> <p>Check to see that all of the cards can be read from and written to by transferring a small file from the host to each card and back. (To avoid caching of the data, hot plug the device between the read and write.)</p>	Pass	Pass	
16	<p>Remove the CF, MS, SM, and SD cards from the device.</p> <p>Repeat steps 14–15 using MD, MS Pro, xD, and MMC.</p>	Pass	Pass	

USB 1.1 Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
17	<p>Surprise Removal Write (USB)—Copy one large file from the host to a CF card. Once the transfer has reached 20% complete, disconnect the USB cable and wait 3–5 seconds. Close any warning dialog boxes and reattach the USB cable. Verify that the device re-enumerates and the card can be read from and written to.</p> <p>Repeat this procedure using several small files (~1 to 10kb) instead of one large file.</p>	Pass	Pass	
18	<p>Surprise Removal Read (USB)—Copy one large file from a CF card to the host. Once the transfer has reached 20% complete, disconnect the USB cable and wait 3–5 seconds. Close any warning dialog boxes and reattach the USB cable. Verify that the device re-enumerates and the card can be read from and written to.</p> <p>Repeat this procedure using several small files (~1 to 10kb) instead of one large file.</p>	Pass	Pass	
19	<p>Surprise Removal Write (Media)—Copy one large file from the host to a CF card. Once the transfer has reached 20% complete, remove the CF media and wait 3–5 seconds. Close any warning dialog boxes and then reinsert the CF media. Wait a few seconds for the card to be recognized and then verify it can be read from and written to.</p> <p>Repeat this procedure using several small files (~1 to 10kb) instead of one large file.</p>	Pass	Pass	

USB 1.1 Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
20	<p>Surprise Removal Read (Media)—Copy one large file from a CF card to the host. Once the transfer has reached 20% complete, remove the CF media and wait 3–5 seconds. Close any warning dialog boxes and then reinsert the CF media. Wait a few seconds for the card to be recognized and then verify it can be read from and written to.</p> <p>Repeat this procedure using several small files (~1 to 10kb) instead of one large file.</p>	Pass	Pass	
21	Repeat steps 17–20 using MD, SM, xD, SD, MMC, MS, and MS Pro.	<p>MD Pass</p> <p>SM Pass</p> <p>xD Pass</p> <p>SD Pass</p> <p>MMC Pass</p> <p>MS Pass</p> <p>MS Pro Pass</p>	<p>MD Pass</p> <p>SM Pass</p> <p>xD Pass</p> <p>SD Pass</p> <p>MMC Pass</p> <p>MS Pass</p> <p>MS Pro Pass</p>	

Driver Test Manager (DTM) Test Suite

Overview

This test suite checks to ensure that the DUT is able to pass the Driver Test Manager (DTM) certification testing. All tests below are performed in a single LUN configuration using the latest DTM available from Microsoft.

Driver Reliability:

#	DTM Test	Windows XP	Windows Vista	Comments
1	Common Scenario Stress with IO	Pass	Pass	
2	Device Path Exerciser	Pass	Pass	
3	Disable Enable with IO	Pass	Pass	
4	Plug and Play Driver Test	Pass	Pass	
5	Prefast for Drivers Test	Pass	Pass	
6	Run INFTest against a Single INF	Pass	Pass	
7	Sleep Stress with IO	Pass	Pass	

Hard Disk Drive:

#	DTM Test	Windows XP	Windows Vista	Comments
1	IFS Test for Storage Logo	Pass	Pass	
2	Storage Device Stress (Removable Media-LOGO)	Pass	Pass	
3	Syscache Test (LOGO)	Pass	Pass	
4	USB Address Description Test	Pass	Pass	
5	USB Descriptor Test	Pass	Pass	

DTM Results (cont.)

#	DTM Test	Windows XP	Windows Vista	Comments
6	USB Device Control Requests	Pass	Pass	
7	USB Device Framework	Pass	Pass	
8	USB Enumeration Stress	Pass	Pass	
9	USB HIDView	Pass	Pass	
10	USB Selective Suspend	Pass	Pass	
11	USB Serial Number	Pass	Pass	
12	USB Specification Compliance	Pass	Pass	

Current Measurements Test Suite

Overview

This test suite checks to ensure that the DUT meets all Current Measurement power requirements.

#	Test Standard	Windows XP	Windows Vista	Comments
1	Unconfigured and Configured Current Using the USBCV test utility, check the unconfigured and configured current for the DUT. Verify that the device draws no more than 100mA in an unconfigured state. Verify that the device draws no more than 100mA in a configured state. Once the test is complete, close the USBCV application and verify that the test stack driver is unloaded and that the device is enumerated normally as a mass storage class device.	Pass	Pass	
2	Operating Current Verify that the device is bus-powered and enumerated properly. Initiate large file transfers simultaneously on all four LUNs. During the transfer, measure the current being drawn by the DUT. In order to pass, the device cannot draw more than 500mA at any time during the operation.	Pass	Pass	
3	Suspend Current Suspend the host. Once the host has stabilized in a suspended state, wait 5 to 10 seconds and then measure the suspended current draw for the DUT. In order to pass the test, the device can draw no more than 500uA while suspended.	Pass	Pass	

Bundled Software Applications Test Suite

Overview

This test suite checks to ensure that all of the applications bundled with the DUT operate properly in accordance with the user instructions provided in the DUT Software Release Notes.

#	Application	Windows XP	Windows Vista	Comments
1	DosPLTU	Pass	Pass	
2	PLDU	Pass	Pass	
3	SetIcon	Pass	Not Supported	
4	QuickTest	Pass	Pass	
5	PLTU	Pass	Pass	
6	ErpmUpdt	Pass	Pass	
7	Card Reader Installer	Pass	Pass	

Device Firmware Upgrade / Descriptor Update Test Suite

Overview

This test suite checks to ensure that both the device firmware upgrade (DFU) and descriptor update functionality of the DUT work properly. Please note that DFU functionality is only available for devices that utilize an external flash ROM. USBDM 1.407 or later must be used for this test.

#	Test Standard	Windows XP	Windows Vista	Comments
1	<p>DFU from old firmware</p> <p>Load the DUT with a DFU enabled eeprom version of "both.bin" binary created from the last release version of the firmware.</p> <p>Perform a DFU update to the version of firmware under test. Verify that the operation completes normally.</p> <p>Unplug the device and reattach it to the host. Verify it enumerates and functions properly. Check the version of the firmware using USBDM. Verify that the updated version is displayed.</p> <p>Repeat this step using the NO EEPROM version of the last released both.bin.</p>	EEPROM Pass NOEEPROM Pass	EEPROM Pass NOEEPROM Pass	
2	<p>DFU from current firmware</p> <p>Load the DUT with a DFU enabled eeprom version of "both.bin" binary created for the firmware under test.</p> <p>Perform a DFU update to the version of firmware under test. Verify that the operation completes normally.</p> <p>Unplug the device and reattach it to the host. Verify it enumerates and functions properly. Check the version of the firmware using USBDM. Verify that the updated version is displayed.</p> <p>Repeat this step using the NO EEPROM version of firmware under test both.bin.</p>	EEPROM Pass NOEEPROM Pass	EEPROM Pass NOEEPROM Pass	

DFU / Descriptor Update Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
3	<p>Surprise removal of USB cable during DFU update</p> <p>Load the DUT with a DFU enabled version of "both.bin" binary created for the firmware under test.</p> <p>Perform a DFU update to the version of firmware under test. When the progress bar reaches "downloading new firmware" (approximately 75%), unplug the USB cable.</p> <p>Reattach the USB cable. Verify it enumerates and functions properly. Perform the DFU update again. Verify that the operation completes normally.</p> <p>Verify by USBDM that the correct version is displayed.</p>	Pass	Pass	
4	<p>Surprise removal of power cable during DFU update</p> <p>Set the DUT to be self-powered and load it with a DFU enabled version of "both.bin" binary created for the firmware under test.</p> <p>Perform a DFU update to the version of firmware under test. When the progress bar reaches "downloading new firmware" (approximately 75%), unplug the power cable.</p> <p>Reattach the power cable. Verify it enumerates and functions properly. Perform the DFU update again. Verify that the operation completes normally.</p> <p>Verify by USBDM that the correct version is displayed.</p>	Pass	Pass	
5	<p>Surprise system shutdown during DFU update</p> <p>Load the DUT with a DFU enabled version of "both.bin" binary created for the firmware under test.</p> <p>Perform a DFU update to the version of firmware under test. When the progress bar reaches "downloading new firmware" (approximately 75%), shut the system down.</p> <p>Restart the system. Verify the board enumerates and functions properly. Perform the DFU update again. Verify that the operation completes normally.</p> <p>Verify by USBDM that the correct version is displayed.</p>	Pass	Pass	

DFU / Descriptor Update Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
6	<p>Descriptor Update</p> <p>Modify an eeprom.dat file and upload it to the device. Once the operation completes, hot plug the device and verify that the eeprom contains the new data. Repeat this test using the "NO.EEPROM" version of the firmware.</p> <p>Continue to use descriptor updates to completely verify the LUN configuration and icon sharing functionality of the device.</p> <p>(Refer to the DUT Software Release Notes for information on LUN Configuration and Icon Sharing.)</p>	<p>EEPROM Pass</p> <p>NOEEPROM Pass</p>	<p>EEPROM Pass</p> <p>NOEEPROM Pass</p>	
7	<p>Descriptor Update</p> <p>Repeat this test using both the "EEPROM" and "NO.EEPROM" version of the firmware.</p> <p>Continue to use descriptor updates to completely verify the Descriptor Attribute bits that apply to the DUT.</p> <p>(Refer to the DUT Software Release Notes for information on the attribute bit settings for DUT.)</p>	<p>EEPROM Pass</p> <p>NOEEPROM Pass</p>	<p>EEPROM Pass</p> <p>NOEEPROM Pass</p>	

LUN Power Configuration Test Suite

Overview

This test suite checks to ensure that the Internal/External FET functionality of the DUT works properly. Internal FETs can be used to operate MS, SM, and SD for the DUT SVB. CF will only be powered by external GPIO9 when using the DUT SVB. By default the DUT SVB is set to run MS, SM, and SD by internal FETs. Since this default setting is used throughout the rest of the test suites, this test suite will focus on external GPIOs powering all cards, a combination of internal and external FETS used to power each slot, and one GPIO powering multiple slots. The DUT SVB hardware is set up for MS to use FET0 or GPIO8, CF to use GPIO9, SM to use FET1 or GPIO10, and SD to use FET2 or GPIO11. Any other configuration will require hardware wire rework to test.

#	Test Standard	Windows XP	Windows Vista	Comments
1	Initial Setup—External GPIOs for MS, SM, CF, and SD Check the "Use LUN Power Configuration" setting under the Configuration tab in the USBDM. Set the LUN Power Config byte to 0x00 , the LUN Power Mask 1 to 0x12 , and the LUN Power Mask 2 to 0x84 . Set the jumpers for external GPIOs to be used for SD, SM, and MS (pins 3–5 and pins 4–6 should have a jumper for J40, J41, and J42).	Pass	Pass	
2	Enumeration—no media Remove all media from the DUT. Connect the DUT to the host computer. Verify that there is no power being supplied to any card. Verify that the device enumerates properly.	Pass	Pass	
3	Restart—no media Restart the host computer with the DUT still attached. Verify that after the system restarts the DUT is properly enumerated and there is no power being supplied to any card.	Pass	Pass	

LUN Power Configuration Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
4	Suspend—no media <p>Suspend the host computer with the DUT still attached. Wake the host system.</p> <p>Verify that after the system is no longer suspended the DUT is properly enumerated and there is no power being supplied to any card.</p>	Pass	Pass	
5	Enumerate with 1 piece of media inserted <p>Remove the DUT from the host computer. Insert a CF card into the DUT. Attach the DUT to the host computer.</p> <p>Verify that the DUT enumerates properly. Verify that there is power being supplied to the CF card.</p> <p>Verify that the CF card can be written to and read from.</p> <p>Remove the CF card. Verify that the card removal was recognized. There should be no power supplied to the CF slot and the CF drive should not be accessible.</p>	Pass	Pass	
6	Reinsertion of 1 piece of media inserted <p>With the DUT board still enumerated, reinsert the CF card.</p> <p>Verify that there is power being supplied to the CF card. Verify that the CF card can be written to and read from.</p>	Pass	Pass	
7	Restart—1 media <p>Restart the host computer with the DUT still attached and the CF still inserted.</p> <p>Verify that after the system restarts the DUT is properly enumerated and there is power being supplied to the CF card. Verify that the CF card can be written to and read from.</p>	Pass	Pass	

LUN Power Configuration Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
8	<p>Suspend—1 media</p> <p>Suspend the host computer with the DUT still attached and the CF still inserted. Verify that while the computer is suspended there is no power being supplied to the CF card.</p> <p>Resume the computer. Verify that after the system is no longer suspended the DUT is properly enumerated and there is power being supplied to the CF card. Verify that the CF card can be written to and read from.</p>	Pass	Pass	
9	<p>Other Media Types</p> <p>Repeat steps 5–8 using MD, SM, xD, SD, MMC, MS, and MS Pro.</p>	<p>MD Pass</p> <p>SM Pass</p> <p>xD Pass</p> <p>SD Pass</p> <p>MMC Pass</p> <p>MS Pass</p> <p>MS Pro Pass</p>	<p>MD Pass</p> <p>SM Pass</p> <p>xD Pass</p> <p>SD Pass</p> <p>MMC Pass</p> <p>MS Pass</p> <p>MS Pro Pass</p>	
10	<p>Enumerate with all media inserted</p> <p>Remove the DUT from the host computer. Insert CF, SM, SD, and MS cards into the DUT. Attach the DUT to the host computer.</p> <p>Verify that the DUT enumerates properly. Verify that there is power being supplied to all cards.</p> <p>Verify that the cards can be written to and read from.</p> <p>Remove the SD card. Verify that the card removal was recognized. There should be no power supplied to the SD slot and the SD drive should not be accessible. Replace the SD card. Verify that all cards can be accessed.</p>	Pass	Pass	
11	<p>Restart—all media</p> <p>Restart the host computer with the DUT still attached and the media still inserted.</p> <p>Verify that after the system restarts the DUT is properly enumerated and there is power being supplied to the cards. Verify that the cards can be written to and read from.</p>	Pass	Pass	

LUN Power Configuration Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
12	<p>Suspend—all media</p> <p>Suspend the host computer with the DUT still attached and the cards still inserted. Verify that while the computer is suspended there is no power being supplied to the cards.</p> <p>Resume the computer. Verify that after the system is no longer suspended the DUT is properly enumerated and there is power being supplied to the cards. Verify that the cards can be written to and read from.</p> <p>Remove the media.</p>	Pass	Pass	
13	<p>Other Media Types</p> <p>Repeat steps 10–12 using MD, xD, MMC, and MS Pro.</p>	Pass	Pass	
14	<p>Setup—MS Internal FET0, SM Internal FET1, CF External GPIO9, SD External GPIO11</p> <p>Check the “Use LUN Power Configuration” setting under the Configuration tab in the USBDM.</p> <p>Set the LUN Power Config byte to 0x14, the LUN Power Mask 1 to 0x12, and the LUN Power Mask 2 to 0x82.</p> <p>Set the jumpers for external GPIOs to be used for SD and internal FETs to be used for SM and MS (pins 3-4 should have a jumper for J40, pins 3-5 and 4-6 should have a jumper for J41, and pins 3-4 should have a jumper for pin J42).</p>	Pass	Pass	
15	<p>Internal and External</p> <p>Repeat steps 2–14 with this setup of SD and CF being powered by external GPIOs, and SM and MS being powered by internal FETs.</p>	Pass	Pass	

LUN Power Configuration Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
16	<p>Setup—Internal FET0 powering shared LUN for MS, SM, and SD, External GPIO9 powering CF</p> <p>Check the “Use LUN Power Configuration” setting under the Configuration tab in the USBDM.</p> <p>Set the LUN Power Config byte to 0x54, the LUN Power Mask 1 to 0x12, and the LUN Power Mask 2 to 0x11.</p> <p>Configure the board to have two LUNs—one for CF and one shared for MS, SM, and SD.</p> <p>The SVB will need to be wired for FET0 to be powering the MS, SM, and SD slots. Remove all jumpers from J40, 41, and 42. These jumpers will be replaced with 3 wires that are connected together at one end. The end with all of the wires connected needs to be placed on pin 4 of J40. The other ends of the 3 wires need to be placed on pin 3 of J40, pin 4 of J41, and pin 4 of J42.</p>	Pass	Pass	
17	<p>Enumeration—no media</p> <p>Remove all media from the DUT device.</p> <p>Connect the DUT device to the host computer.</p> <p>Verify that there is no power being supplied to any card and that the device enumerates.</p>	Pass	Pass	
18	<p>Restart—no media</p> <p>Restart the host computer with the DUT still attached.</p> <p>Verify that after the system restarts that the DUT is properly enumerated and there is no power being supplied to any card.</p>	Pass	Pass	
19	<p>Suspend—no media</p> <p>Suspend the host computer with the DUT still attached. Wake the host system.</p> <p>Verify that after the system is no longer suspended the DUT is properly enumerated and there is no power being supplied to any card.</p>	Pass	Pass	

LUN Power Configuration Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
20	<p>Enumerate with 1 piece of media inserted</p> <p>Remove the DUT from the host computer. Insert a CF card into the DUT. Attach the DUT to the host computer.</p> <p>Verify that the DUT enumerates properly. Verify that there is power being supplied to the CF card.</p> <p>Verify that the CF card can be written to and read from.</p> <p>Remove the CF card. Verify that the card removal was recognized. There should be no power supplied to the CF slot and the CF drive should not be accessible.</p>	Pass	Pass	
21	<p>Reinsertion of 1 piece of media inserted</p> <p>With the DUT board still enumerated, reinsert the CF card.</p> <p>Verify that there is power being supplied to the CF card. Verify that the CF card can be written to and read from.</p>	Pass	Pass	
22	<p>Restart—1 media</p> <p>Restart the host computer with the DUT still attached and the CF still inserted.</p> <p>Verify that after the system restarts the DUT is properly enumerated and there is power being supplied to the CF card. Verify that the CF card can be written to and read from.</p>	Pass	Pass	
23	<p>Suspend—1 media</p> <p>Suspend the host computer with the DUT still attached and the CF still inserted. Verify that while the computer is suspended there is no power being supplied to the CF card.</p> <p>Resume the computer. Verify that after the system is no longer suspended the DUT is properly enumerated and there is power being supplied to the CF card. Verify that the CF card can be written to and read from.</p> <p>Remove the CF card.</p>	Pass	Pass	

LUN Power Configuration Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
24	Other Media Types Repeat steps 20–23 using MD, SM, xD, SD, MMC, MS, and MS Pro.	MD Pass SM Pass xD Pass SD Pass MMC Pass MS Pass MS Pro Pass	MD Pass SM Pass xD Pass SD Pass MMC Pass MS Pass MS Pro Pass	
25	Enumerate with all media inserted Remove the DUT from the host computer. Insert CF and SD cards into the DUT. Attach the DUT to the host computer. Verify that the DUT enumerates properly. Verify that there is power being supplied to all cards. Verify that the cards can be written to and read from. Remove the SD card. Verify that the card removal was recognized. There should be no power supplied to the SD slot and the SD drive should not be accessible. Replace the SD card. Verify that all cards can be accessed.	Pass	Pass	
26	Restart—all media Restart the host computer with the DUT still attached and the media still inserted. Verify that after the system restarts the DUT is properly enumerated and there is power being supplied to the cards. Verify that the cards can be written to and read from.	Pass	Pass	

LUN Power Configuration Results (cont.)

#	Test Standard	Windows XP	Windows Vista	Comments
27	<p>Suspend—all media</p> <p>Suspend the host computer with the DUT still attached and the cards still inserted. Verify that while the computer is suspended there is no power being supplied to the cards.</p> <p>Resume the computer. Verify that after the system is no longer suspended the DUT is properly enumerated and there is power being supplied to the cards. Verify that the cards can be written to and read from.</p> <p>Remove the media.</p>	Pass	Pass	
28	<p>Other Media Types</p> <p>Repeat steps 25–27 using the following combinations: CF/MS, CF/SM, MD/MMC, MD/xD, MD/MS Pro.</p>	<p>CF/MS Pass</p> <p>CF/SM Pass</p> <p>MD/MMC Pass</p> <p>MD/xD Pass</p> <p>MD/MS Pro Pass</p>	<p>CF/MS Pass</p> <p>CF/SM Pass</p> <p>MD/MMC Pass</p> <p>MD/xD Pass</p> <p>MD/MS Pro Pass</p>	

Memory Stick Compiancy Test Suite

Overview

This test ensures that all tests listed in Sony Corporation's *Memory Stick Implementation Check Procedures* version 1.0.2.1 (01-16-06) pass with the DUT. Refer to the *Memory Stick Implementation Check Procedures* document for specific instructions on how to perform each individual test listed below.

Test #	Test Description	Windows XP	Windows Vista	Comments
TEST 001	Making Logical/Physical Transformation Table Block	Pass	N/A	
TEST 002	Erasing Logical/Physical Transformation Table Block	Pass	N/A	
TEST 003	Abnormality of Boot Block	Pass	N/A	
TEST 004	Disable Block	Pass	N/A	
TEST 005	Recognition of Read Only Media	Pass	N/A	
TEST 006	Boot Area Protection Process	Pass	N/A	
TEST 007	Erasing Unused Blocks	Pass	N/A	
TEST 008	Management of Alternate Block	Pass	N/A	
TEST 009	Management of Logical Address	Pass	N/A	
TEST 010	Update Status	Pass	N/A	

Memory Stick Compliancy Results (cont.)

Test #	Test Description	Windows XP	Windows Vista	Comments
TEST 011	Block Status/Page Status	Pass	N/A	
TEST 012	Logical Access at Start-up Sequence	Pass	N/A	
TEST 013	Logical Access at Write Process	Pass	N/A	
TEST 014	Format Process	Pass	N/A	

Memory Stick Pro Compliancy Test Suite

Overview

This test ensures that all tests listed in Sony Corporation's *Memory Stick PRO Compliant Products Test Specification* pass with the DUT.

#	Test Description	Windows XP	Windows Vista	Comments
1	Tester version: 1.06.070A (7-10-06)	Pass	N/A	

Macintosh OS Specific Testing

Overview

This test suite summarizes the testing performed in the Macintosh operating systems.

#	Test Suite	Mac OS 10.4	Comments
1	Installation	Pass	
2	Compact Flash / MicroDrive	Pass	
3	Smart Media / xD	Pass	
4	Memory Stick / Memory Stick Pro	Pass	
5	Secure Digital / Multimedia Card	Pass	
6	Multiple Device	Pass	
7	Load / Unload	Pass	
8	USB 1.1	Pass	
9	MAC DFU	Pass	