

WiFly GSX Super Module "SuRF Board"

Features

- UART interface with RS232 and TTL signaling
- Through hole board simplifies system integration
- Accepts 3-12VDC
- Status LEDs to show network status and data transfer
- Ultra-low power - 4uA sleep, 50mA Rx, 210mA Tx (max)
- High throughput, 1Mbps sustained data rate with TCP/IP and WPA2
- Through hole design with mounting posts
- Jumpers for setting adhoc mode
- On board ceramic chip antenna and U.FL connector for external antenna
- 10 general purpose digital I/O
- 8 analog sensor interfaces
- Real-time clock for wakeup and time stamping
- On board ECOS -OS, TCP/IP stacks
- Wi-Fi Alliance certified for WPA2-PSK
- FCC / CE / ICS certified and RoHS compliant.

Applications

- Wireless serial connections
- Remote sensors
- Telemetry
- Security
- Industrial sensors and controls
- Home Automation



Description

The RN-134 "SuRF" board is field ready, WiFi certified 802.11 b/g solution. The SuRF board has the flexibility to connect directly to a standard RS232 interface or through the TTL UART interface to embedded systems. The status LEDs and jumpers enable rapid prototyping and integrating into existing systems.

The RN-134 is built upon Roving Networks RN-131 WiFly-GSX module. The WiFly GSX module incorporates a 2.4GHz radio, processor, Full TCP/IP stack, real-time clock, FTP, DHCP, DNS and web server. The RN-131G is the smallest, lowest power 802.11 b/g module available. The module supports adhoc and infrastructure networking.

In the simplest configuration the hardware only requires four connections (PWR, TX, RX, GND). In cases where power is available on the RS232 DB9 connector of your application, the RN134 can be directly wired to create an instant serial to Wifi network link.

Additionally, the analog sensor interface provides direct connections to send temperature, acceleration and other analog data without requiring additional hardware. The WiFly GSX module is programmed and controlled with a simple ASCII command language. Once the WiFly GSX is setup it can scan to find an access point, associate, authenticate and connect over any Wifi network.

Overview

- Host Data Rate up to 1 Mbps for UART interface, 230400 for RS232 interface.
- Intelligent, built-in power management with programmable wakeup
- Powered from regulated 3.3-3.7V source or 2.0-3.0V batteries
- Real time clock for time stamping, auto-sleep and auto-wakeup modes
- Configuration over WiFi or UART using simple ASCII commands
- Over the air firmware upgrade via FTP
- Secure WiFi authentication: WEP-64, WEP-128, WPA, WPA2
- Built in networking applications DHCP, DNS, ARP, ICMP UDP, Telnet, FTP
- 802.11 power save and roaming functions

Environmental Conditions

Parameter	Value
Temperature Range (Operating)	-30 °C ~ 85 °C
Temperature Range (Storage)	-30 °C ~ 85 °C
Relative Humidity (Operating)	≤90%
Relative Humidity (Storage)	≤90%

Electrical Characteristics

Supply Voltage	Min	Typ	Max	Unit
Supply Voltage VDD	3.0	3.3	12	V
UART interface	3.0	3.3	3.3	V
Power consumption				
Sleep		4		μA
Standby (doze)	-	15	-	mA
Connected (idle, RX)		40		mA
Connected (TX)		140	212	mA


Analog Sensor Inputs

Parameter	Value
Sense 0,1,2,3 wakeup detect threshold	500mV
AD sense 0-7 measurement range	0-400mV
Precision	14 bits = 12μV
Accuracy	5% un-calibrated, .01% calibrated
Minimum conversion time	35μS (5kHz over wifi)
Sensor Power (pin 33) output resistance 3.3V	10 ohms, max current = 50mA


Radio Characteristics

Parameter	Specifications
Frequency	2402 ~ 2480MHz
Modulation	802.11b compatibility : DSSS(CCK-11, CCK-5.5, DQPSK-2, DBPSK-1) 802.11g : OFDM (default)
Channel intervals	5MHz
Channels	1 - 14
Transmission rate (over the air)	1 – 11Mbps for 802.11b / 6 – 54Mbps for 802.11g
Receive sensitivity	-85dBm typ.
Output level (Class1)	+18dBm
Maximum RF input to U.FL connector	10 dBm


Board Description

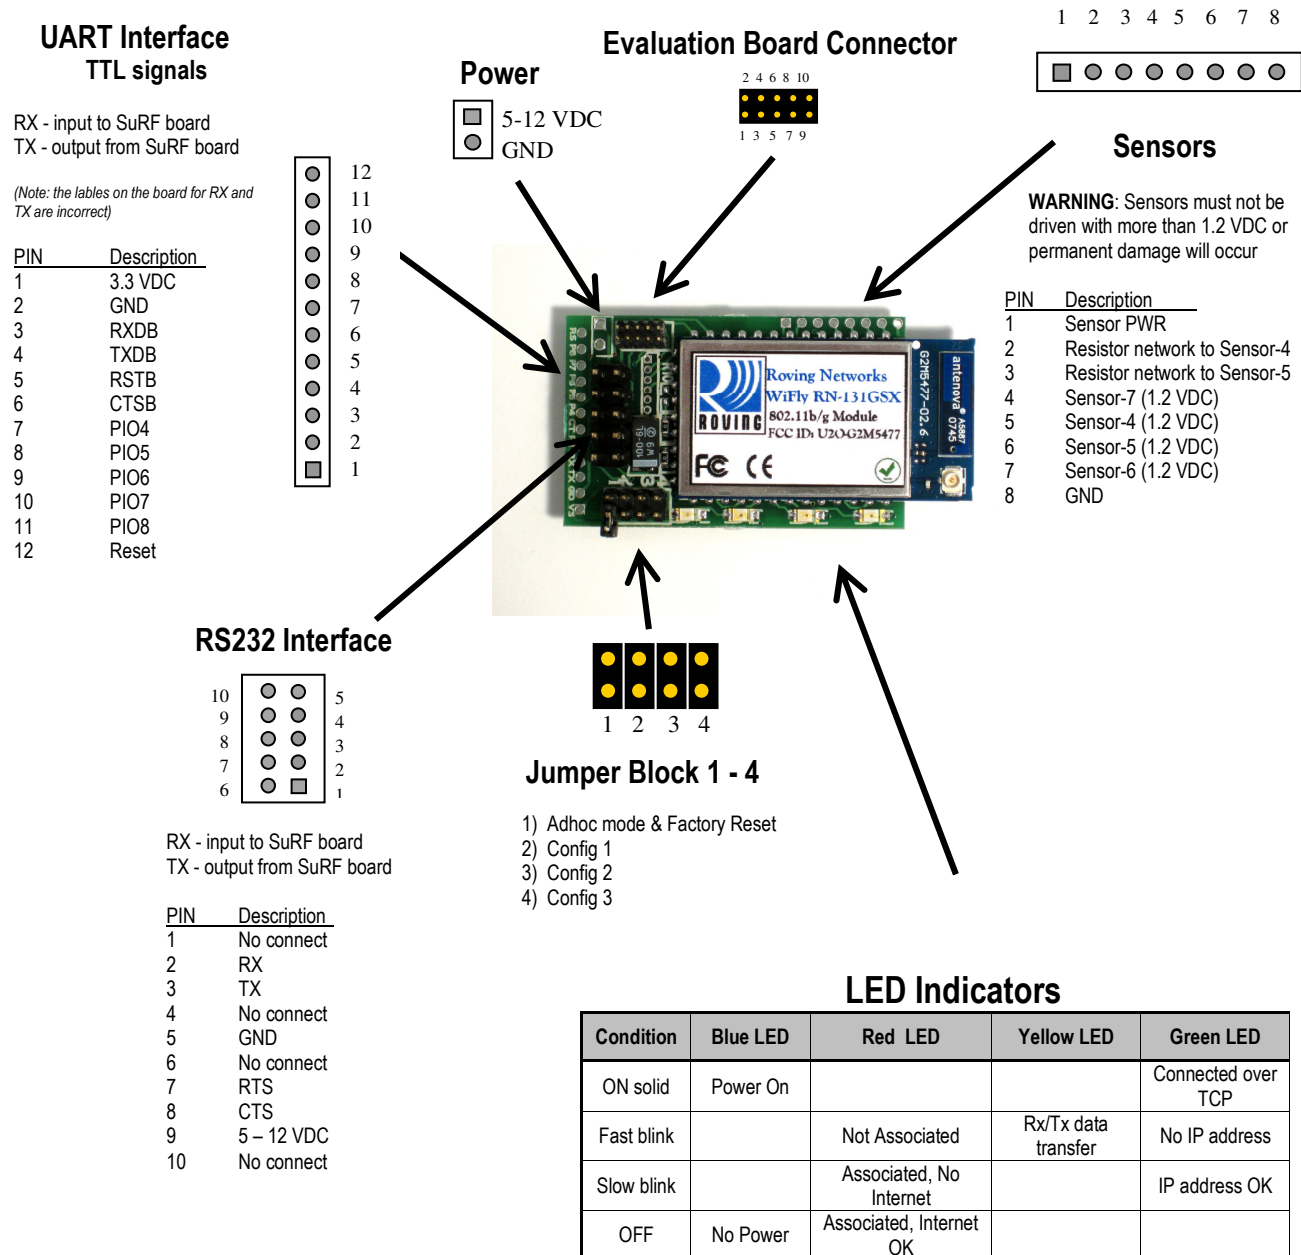

Physical Dimensions

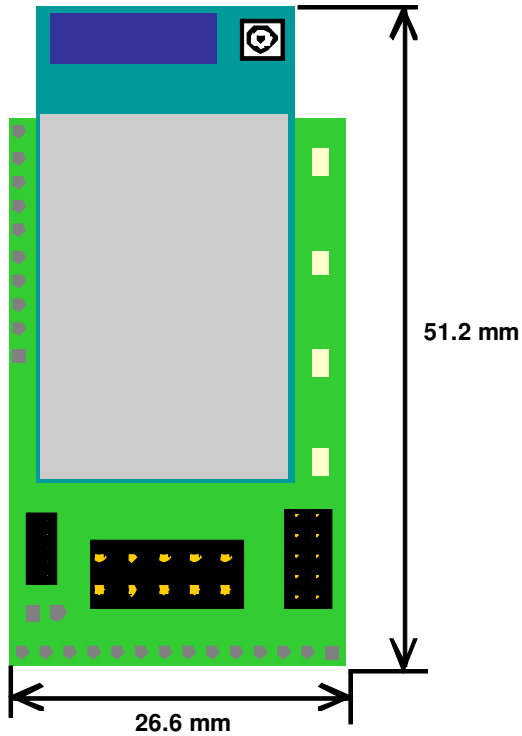

Top view

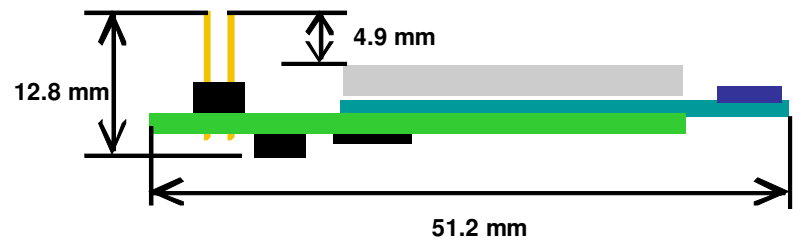

WiFly GSX Super Module "SuRF Board"

Features

- UART interface with RS232 and TTL signaling
- Through hole board simplifies system integration
- Accepts 3-12VDC
- Status LEDs to show network status and data transfer
- Ultra-low power - 4uA sleep, 50mA Rx, 210mA Tx (max)
- High throughput, 1Mbps sustained data rate with TCP/IP and WPA2
- Through hole design with mounting posts
- Jumpers for setting adhoc mode
- On board ceramic chip antenna and U.FL connector for external antenna
- 10 general purpose digital I/O
- 8 analog sensor interfaces
- Real-time clock for wakeup and time stamping
- On board ECOS -OS, TCP/IP stacks
- Wi-Fi Alliance certified for WPA2-PSK
- FCC / CE / ICS certified and RoHS compliant.

Applications

- Wireless serial connections
- Remote sensors
- Telemetry
- Security
- Industrial sensors and controls
- Home Automation



Description

The RN-134 "SuRF" board is field ready, WiFi certified 802.11 b/g solution. The SuRF board has the flexibility to connect directly to a standard RS232 interface or through the TTL UART interface to embedded systems. The status LEDs and jumpers enable rapid prototyping and integrating into existing systems.

The RN-134 is built upon Roving Networks RN-131 WiFly-GSX module. The WiFly GSX module incorporates a 2.4GHz radio, processor, Full TCP/IP stack, real-time clock, FTP, DHCP, DNS and web server. The RN-131G is the smallest, lowest power 802.11 b/g module available. The module supports adhoc and infrastructure networking.

In the simplest configuration the hardware only requires four connections (PWR, TX, RX, GND). In cases where power is available on the RS232 DB9 connector of your application, the RN134 can be directly wired to create an instant serial to Wifi network link.

Additionally, the analog sensor interface provides direct connections to send temperature, acceleration and other analog data without requiring additional hardware. The WiFly GSX module is programmed and controlled with a simple ASCII command language. Once the WiFly GSX is setup it can scan to find an access point, associate, authenticate and connect over any Wifi network.

6.

Having this jumper on at power up also arms the restore factory reset function. After power up, if jumper 1 is toggled on and off five times while the module the configuration will be RESTORED to the initial settings. This is very useful in cases where the module is mis-configured and no is long responding to commands.

Compliance Information

FCC	ID U3O-G2M5477 Part 15.247
IC	(canada) RSS-210
CE	EU ID # 0681
REG	U9M20901-1000-C
RADIO	EN 300328 V1.7.1 (10/2006)
EMC	EN 301489-1 V1.8.1 (04/2008), EN 301489-17 V1.3.2 (04/2008)
SAFETY	EN 60950-1:2001+A11:2004
RoHs	Compliant

Ordering Information

Part Number	Description
RN-134	With chip antenna and U.FL jack. Standard firmware version
RN-131G	WiFly-GSX 802.11 b/g surface mount module
RN-131G-EVAL	Development Kit (Includes the RN-134 module)
RN-UFL-SMA6	6 inch cable with U.FL connector on one end and SMA on the other
RN-SMA4-RP	4" external antenna with reverse polarity SMA connector. Used with RN-UFL-SMA6
For other configurations, contact Roving Networks directly.	

Visit <http://www.rovingnetworks.com> for current pricing and a list of distributors carrying our products.

Copyright © 2009 Roving Networks. All rights reserved.

Roving Networks reserves the right to make corrections, modifications, and other changes to its products, documentation and services at any time. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

Roving Networks assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using Roving Networks components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

Roving Networks products are not authorized for use in safety-critical applications (such as life support) where a failure of the Roving Networks product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use.

All other trademarks are property of their respective owners.